

SEALED POWER TRANSFORMERS

44000 Series EI 48-16.8 (10VA)






FEATURES

- UL and VDE Approvals
- Vacuum Filled
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength 4200Vrms
- Inherently energy limited
- Resin Class B IEC 85(20,000h Testing to IEC 216)
- Conforms to EN 60742
- 100% Production Tested
- Weight: 300grams





OUTLINE DIMENSIONS

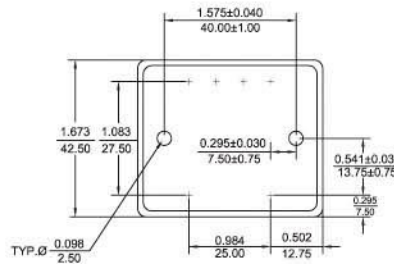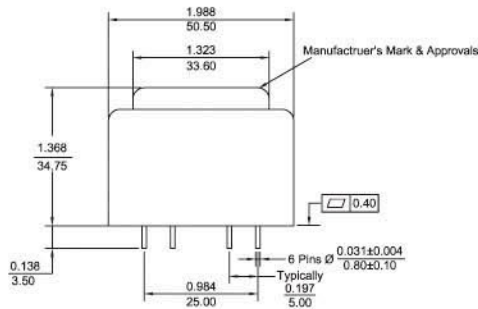

ELECTRICAL SPECIFICATIONS

ORDER NO. 115VAC Pri. Protection 125mA	ORDER NO. 230VAC Pri. Protection 125mA	SEC. VOLTAGE V	SEC. CURRENT mA	NO-LOAD VOLTAGE V	AMBIENT TEMP. °C
44277	44265	6	1667	7.2	50
44278	44266	9	1111	10.8	50
44279	44267	12	833	14.4	50
44280	44268	15	667	18.1	50
44281	44269	18	556	21.6	50
44282	44270	24	417	28.9	50
44283	44271	2 x 6	2 x 883	2 x 7.2	50
44284	44272	2 x 9	2 x 556	2 x 10.8	50
44285	44273	2 x 12	2 x 417	2 x 14.4	50
44286	44274	2 x 15	2 x 333	2 x 18.1	50
44287	44275	2 x 18	2 x 278	2 x 21.6	50
44288	44276*	2 x 24	2 x 208	2 x 28.9	50



Note: Circuit isolation protection is provided per EN 60742

- Limited Approval Ratings