


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

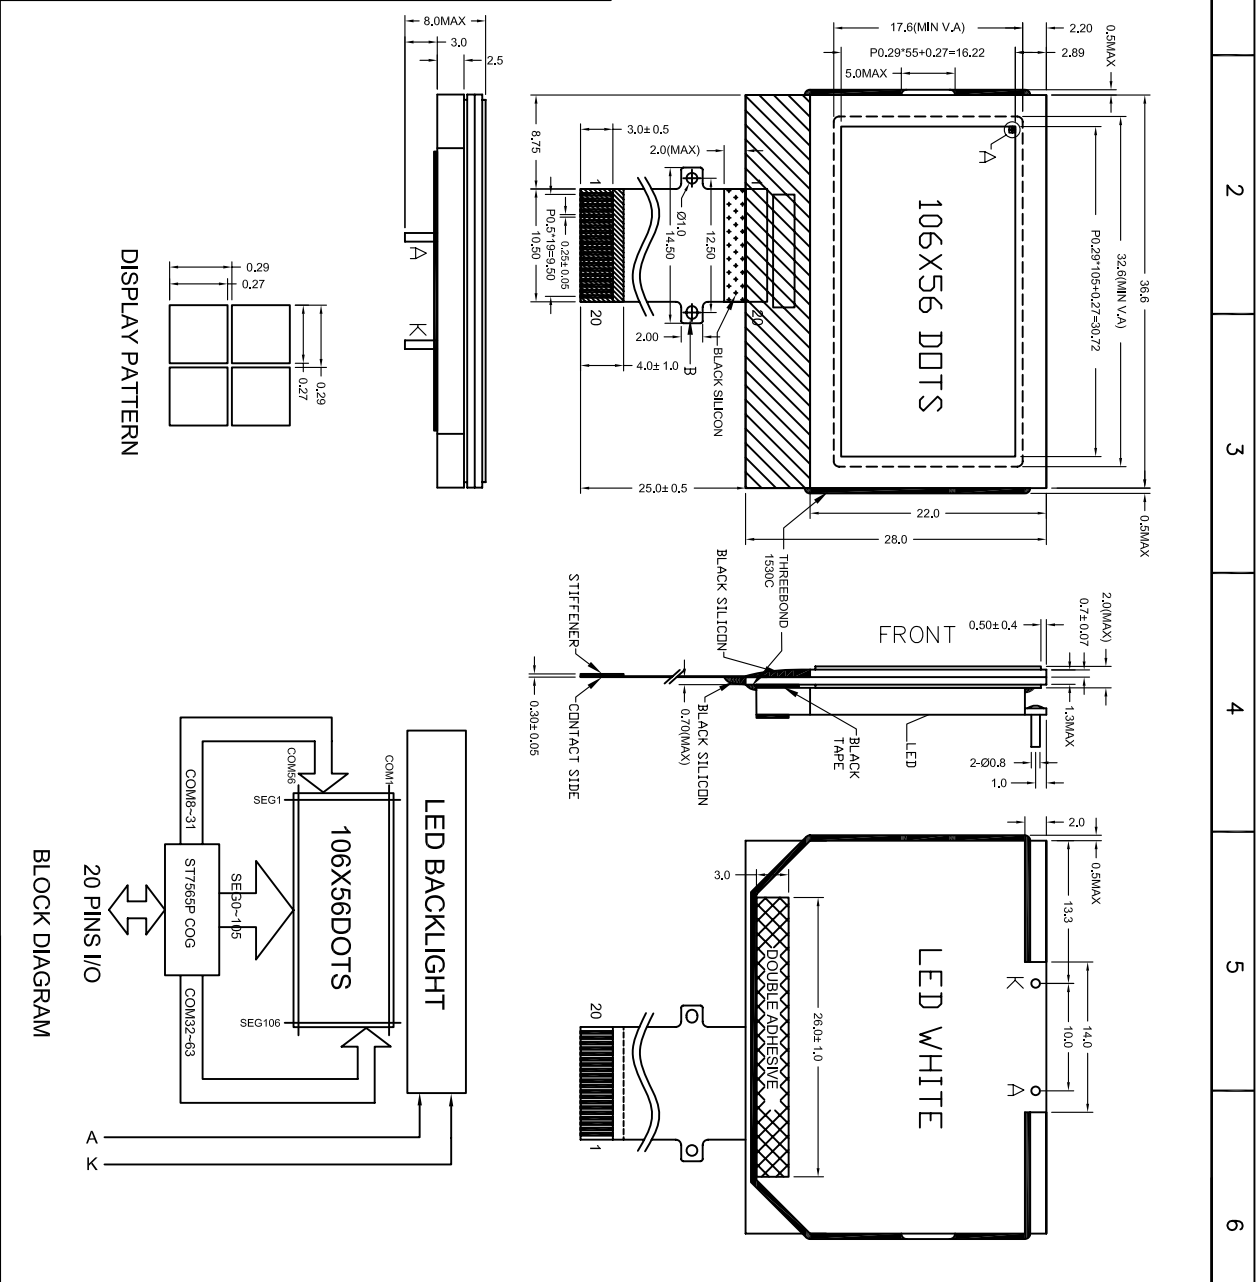

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE STN GRAY MODE STN BLUE MODE FSTN
POLARIZER TYPE	REFLECTIVE TRANSFLECTIVE TRANSMISSIVE, POSITIVE TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK 12 O'CLOCK WHITE Y-G RED GREEN AMBER TRI-COLOR
LED BACKLIGHT	LED WHITE
TEMPERATURE RANGE	STANDARD TEMPERATURE WIDE TEMPERATURE
CHARACTER PATTERNS	- - - -
OPERATING VOLTAGE	3.0V
LED DRIVING VOLTAGE	9.5V
LED DRIVE METHOD	1/6SDUTY 1/9BIAS
LED DRIVE IC	ST7566P COG
NOTE:	

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

20	NC
19	/CS1
18	/RES
17	A0
16	SCL
15	SI
14	VDD
13	VSS
12	VOUT
11	CAP3P
10	CAP1N
9	CAP1P
8	CAP2P
7	CAP2N
6	V4
5	V3
4	V2
3	V1
2	V0
1	NC
PIN	SYMBOL

THE PART NUMBER IN MASS PRODUCTION	
1.FSTN, TRANSFLECTIVE LCD; WHITE BACKLIGHT; 6 O'CLOCK	
2.FSTN, TRANSFLECTIVE LCD; Y-G BACKLIGHT; 6 O'CLOCK	
3.--	SCALE: 1:1
4.--	DRAWN:
5.--	CHECKED:
6.--	APPROVED:
TITLE: LCM	
MODEL NO: AQM1056B SERIES	
PART NO:	REV A
	SH NO 1/1

**DISPLAYTRONIC**  
XIAMEN ZETTLER ELECTRONICS CO., LTD.