




1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

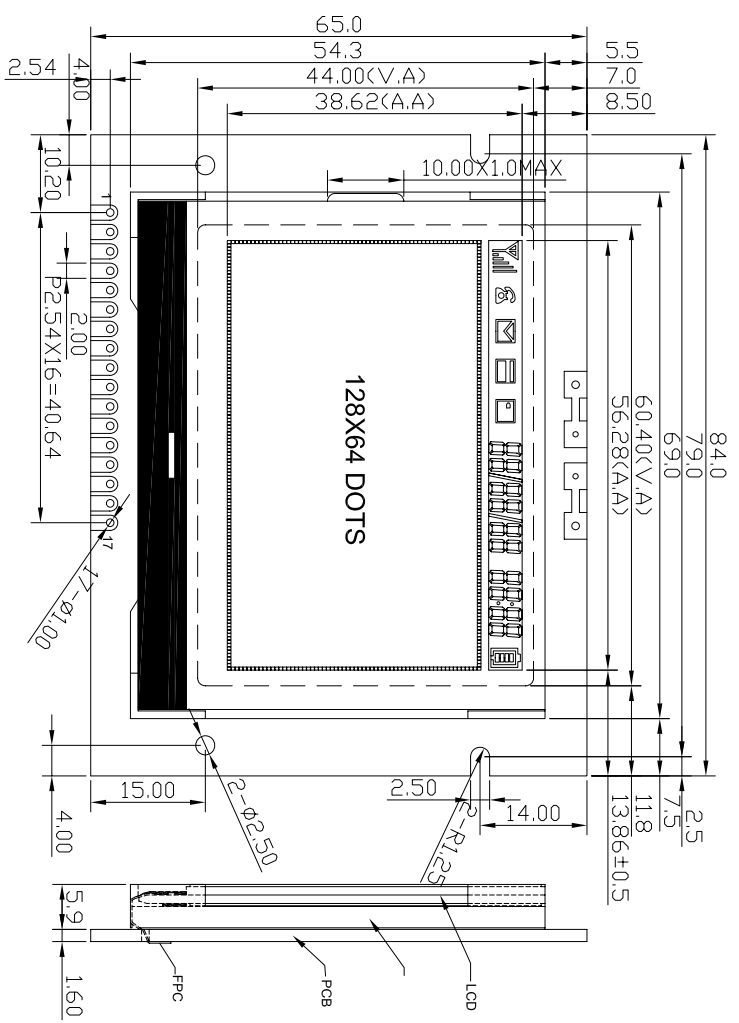

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
DB7	DB6	DB5	DB4	DB3	DB2	DB1	E	RS	RW	VO	VDD	VSS	LED-	LED+	CS1	

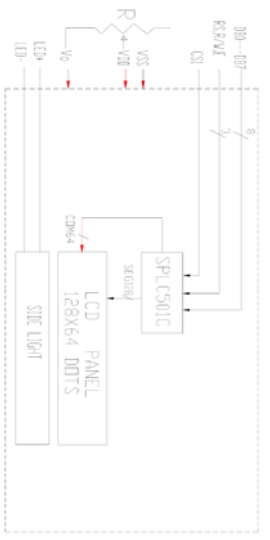

BLOCK DIAGRAM



Display Pattern

17	CS1
16	LED+
15	LED-
14	VSS
13	VDD
12	VO
11	RS
10	RW
9	E
8	DB0
7	DB1
6	DB2
5	DB3
4	DB4
3	DB5
2	DB6
1	DB7

UNIT	TOLERANCE
MM	X.X = ±0.2
3RD ANGLE	X.XX = ±0.10
ANG	ANG = -
SCALE:	1:1
DRAWN:	
CHECKED:	
APPROVED:	

<b>DISPLAYTRONIC</b>	
XIAMEN ZETTLER ELECTRONICS CO., LTD.	
TITLE:	LCM
MODEL NO:	AQM1264U SERIES
PART NO:	
REV	A
SH NO	1/1

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE STN GRAY MODE STN BLUE MODE FSTN
POLARIZER TYPE	REFLECTIVE TRANSPARENT TRANSMISSIVE, POSITIVE TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
LED BACKLIGHT	WHITE Y-G RED GREEN BLUE AMBER
TEMPERATURE RANGE	STANDARD TEMPERATURE WIDE TEMPERATURE
CHARACTER PATTERNS	-
OPERATING VOLTAGE	3.3V
LED DRIVING VOLTAGE	9.2V
LED DRIVE METHOD	1/65 DUTY 1/9 BIAS
LED DRIVE IC	SPC501C

NOTE:

A	B	C	D	E	F	7	8
---	---	---	---	---	---	---	---