


EI48-12VA TRANSFORMER ADH500 SERIES

FEATURES,

- UL5015-1,-3 Approved:UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application

OUTLINE DIMENSIONS

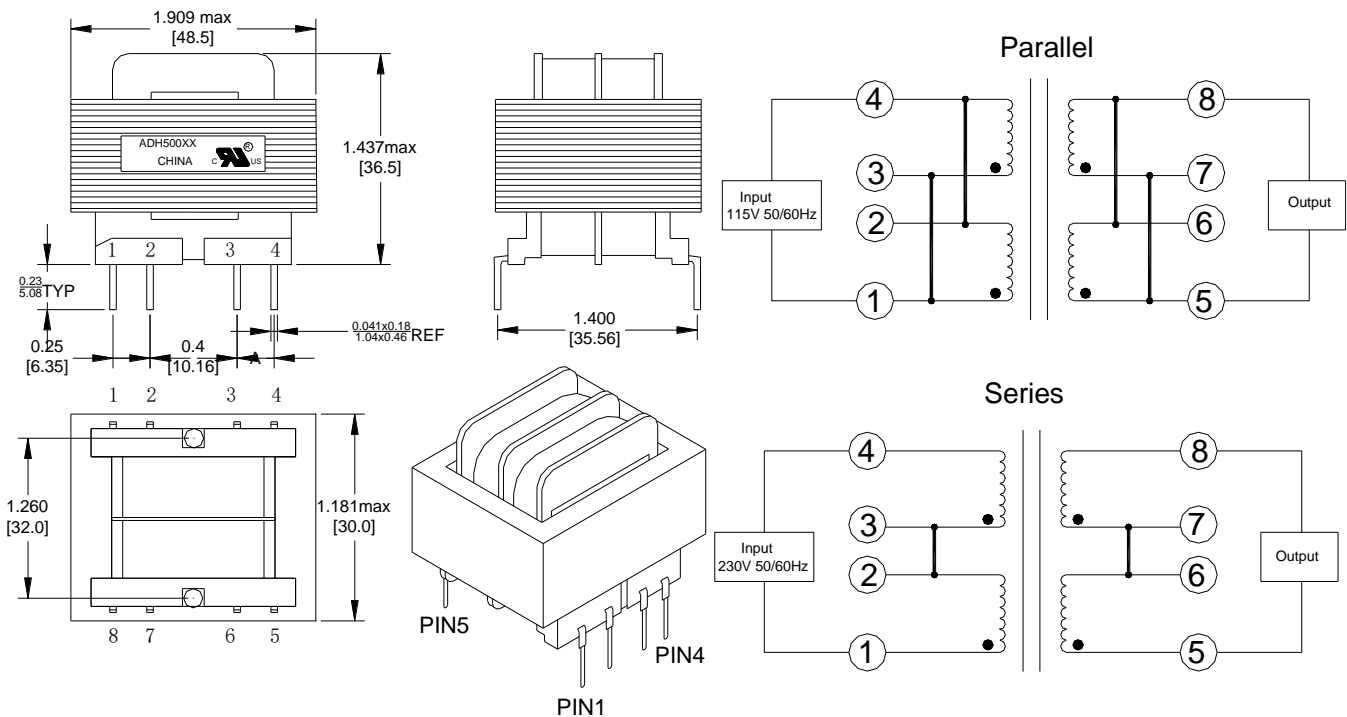

ELECTRONIC SPECIFICATIONS

Part NO	Input Voltage (V)	Series		Parallel		Rated Power (VA)	Certificate	
		Voltage (Vac)	Current (mA)	Voltage (Vac)	Current (mA)		UL	CE
ADH50010	115V/230V	10	1200	5	2400	12.0VA	•	
ADH50012	115V/230V	12.6	1000	6.3	2000	12.0VA	•	
ADH50016	115V/230V	16	800	8	1600	12.0VA	•	
ADH50020	115V/230V	20	600	10	1200	12.0VA	•	
ADH50024	115V/230V	24	500	12	1000	12.0VA	•	
ADH50028	115V/230V	28	420	14	840	12.0VA	•	
ADH50036	115V/230V	36	350	18	700	12.0VA	•	
ADH50048	115V/230V	48	250	24	500	12.0VA	•	
ADH50056	115V/230V	56	220	28	440	12.0VA	•	
ADH500120	115V/230V	120	100	60	200	12.0VA	•	