
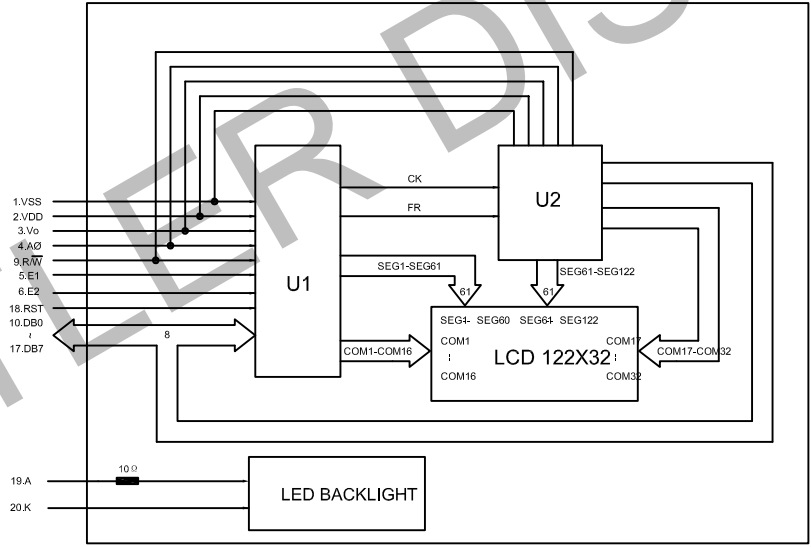


20	BL-
19	BL+
18	RST (NC)
17	DB7
16	DB6
15	DB5
14	DB4
13	DB3
12	DB2
11	DB1
10	DB0
9	R/W
8	NC
7	NC
6	E2
5	E1
4	A0
3	V0
2	VDD
1	VSS
PIN	SYMBOL



ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE, POSITIVE
VIEWING DIRECTION	TRANSMISSIVE, NEGATIVE
	6 O'CLOCK
LED BACKLIGHT	12 O'CLOCK
	WHITE
	YELLOW-GREEN
	RED
	GREEN
	BLUE
	AMBER
TEMPERATURE RANGE	-
	STANDARD TEMPERATURE
CHARACTER PATTERNS	WIDE TEMPERATURE
OPERATING VOLTAGE	5.0V
LCD DRIVING VOLTAGE	6.8V
LCD DRIVE METHOD	1/32 DUTY 1/6 BIAS
LCD DRIVE IC	PT6520

THE PART NUMBER IN MASS PRODUCTION

1.	FSTN, TRANSFLECTIVE LCD; YELLOW-GREEN BACKLIGHT; 6 O'CLOCK;
2.	--
3.	--
4.	--
SCALE: 1:1	
DRAWN:	
CHECKED:	
APPROVED:	

UNIT	MM	TOLERANCE
		X.X = ±0.3
3RD ANGLE		X.XX = ±0.20
		ANG = -

**ZETTLER DISPLAYS**  
XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM		
MODEL NO:	AGM1232G SERIES	REV	A
PART NO:		SH NO	1/1