

F

E

D

C

B

A

F

E






D

C

B

A

28	PS
27	C86
26	V0
25	V1
24	V2
23	V3
22	V4
21	CAP2-
20	CAP2+
19	CAP1+
18	CAP1-
17	CAP3+
16	VOUT
15	VSS
14	VDD
13	D7
12	D6
11	D5
10	D4
9	D3
8	D2
7	D1
6	D0
5	/RD
4	/WR
3	A0
2	/RES
1	CS1
PIN NO.	SYMBOL

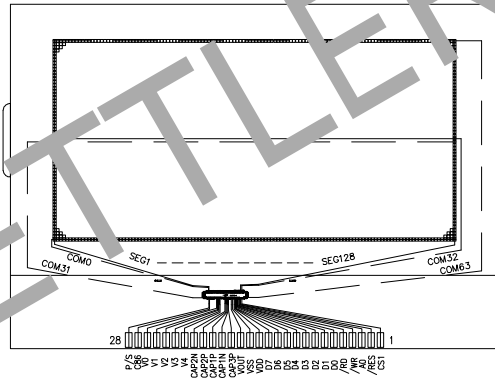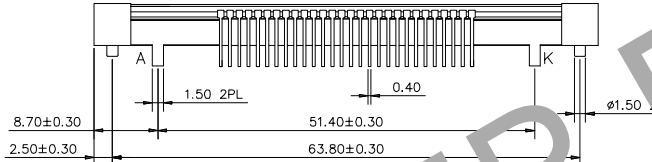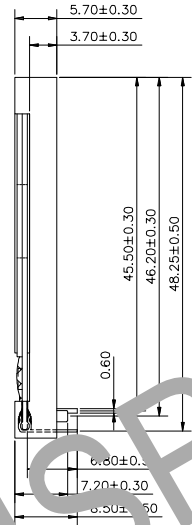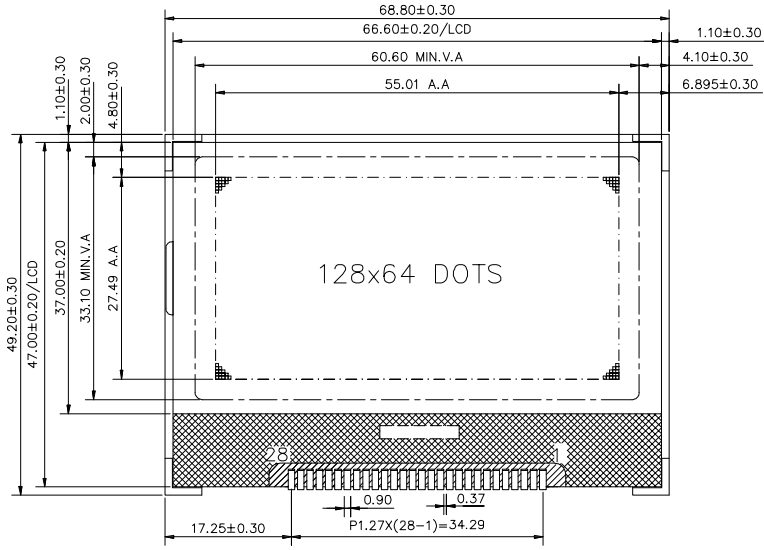

DOT DETAIL
SCALE 5:1

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
	12 O'CLOCK
LED BACKLIGHT	WHITE
	ORG
	RED
	GREEN
	BLUE
	AMBER
	--
TEMPERATURE RANGE	STANDARD TEMPERATURE WIDE TEMPERATURE
CHARACTER PATTERNS	
OPERATING VOLTAGE	3.3V
LCD DRIVING VOLTAGE	9.0V
LCD DRIVE METHOD	1/65 DUTY 1/9BIAS
LCD DRIVE IC	ST7565R

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G), TRANSFLECTIVE LCD; Y-G BACKLIGHT; 6 O'CLOCK

UNIT	TOLERANCE
MM	X.X = ±0.2
3RD ANGLE	X.XX = ±0.20
	ANG = -
SCALE:	1:1
DRAWN:	
CHECKED:	
APPROVED:	

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM
MODEL NO:	AQM126AX SERIES
REV	A
PART NO:	SH NO 1/1