


1.5VA SURGE PROTECTED TRANSFORMER EI30-12.5


FEATURES

- Withstand 10KV surge test.
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 4200VAC
- Class B (130° C) insulation material.
- Operating temperature from -40 ° C to 70° C
- Storage temperature from -40 ° C to 120° C
- Design according to IEC61588

SURGE TEST SCHEMATIC:

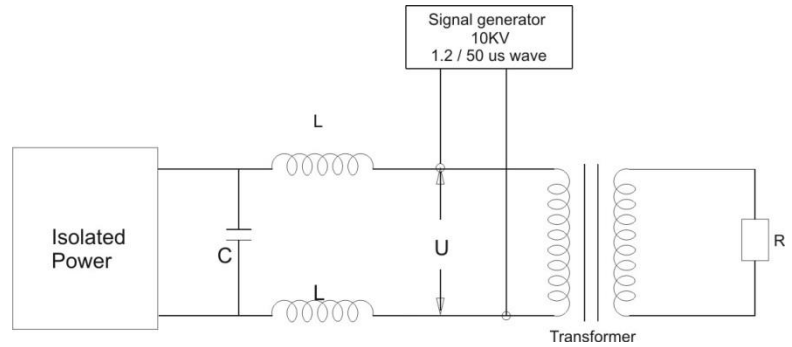

OUTLINE DIMENSIONS

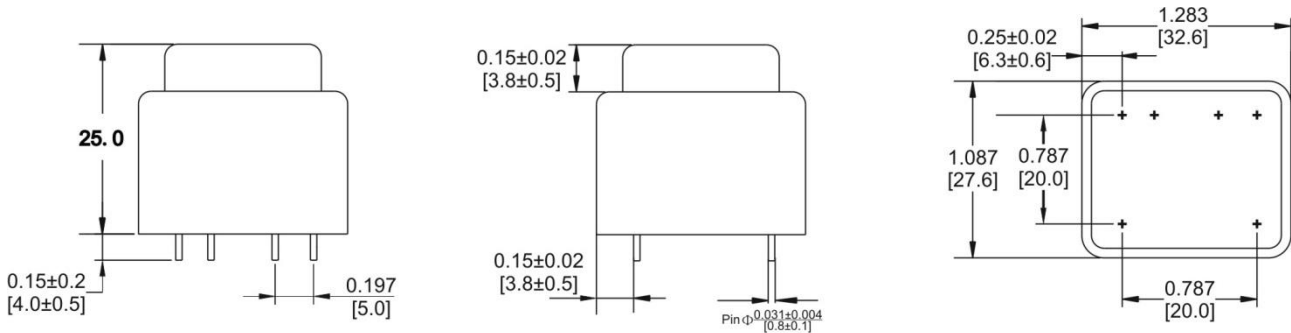

OUTLINE DIMENSIONS

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Surge Voltage	Weight (g)
HS301S06015	115V	6	250	1.5VA	10.4	T 70 B	10KV	80
HS301S09015	115V	9	167	1.5VA	14.5	T 70 B	10KV	80
HS301S10015	115V	10	150	1.5VA	15.5	T 70 B	10KV	80
HS301S12015	115V	12	125	1.5VA	20.7	T 70 B	10KV	80
HS301S15015	115V	15	100	1.5VA	25.8	T 70 B	10KV	80
HS301S18015	115V	18	83	1.5VA	30.8	T 70 B	10KV	80
HS301S24015	115V	24	63	1.5VA	41.4	T 70 B	10KV	80
HS302S06015	230V	6	250	1.5VA	10.4	T 70 B	10KV	80
HS302S09015	230V	10	167	1.5VA	14.5	T 70 B	10KV	80
HS302S10015	230V	9	150	1.5VA	15.5	T 70 B	10KV	80
HS302S12015	230V	12	125	1.5VA	20.7	T 70 B	10KV	80
HS302S15015	230V	15	100	1.5VA	25.8	T 70 B	10KV	80
HS302S18015	230V	18	83	1.5VA	30.8	T 70 B	10KV	80
HS302S24015	230V	24	63	1.5VA	41.4	T 70 B	10KV	80