




### ORDERING CODE

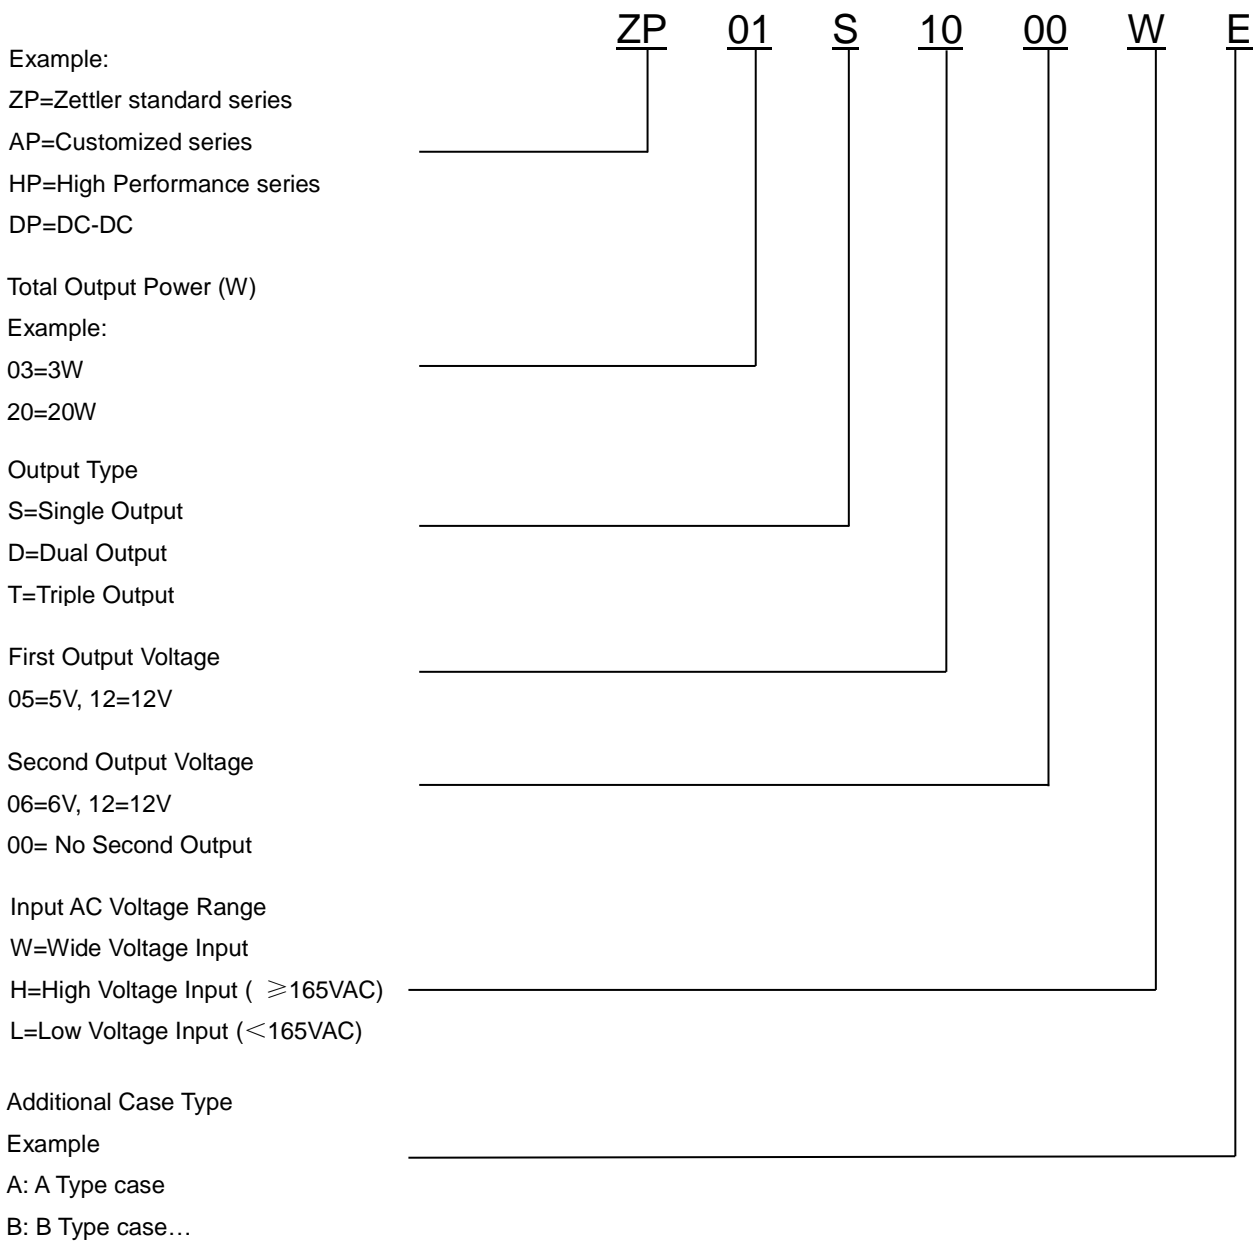

**FEATURES**

- PCB mounted switching Power module
- AC input voltage range: 90VAC~265VAC
- DC input voltage range: 100VDC~370VDC
- Ambient temperature range:-25°C~85°C
- Storage temperature range:-40°C~105°C
- Leakage current (input :277VAC):<0.1mA
- Isolation voltage: input –Output $\geq$ 3000Vac 60S
- Insulation Resistance: Input –Output 500VDC $\geq$ 100M Ohms
- MTBF(at 25°C 70%RH environment):>300000hrs
- Compact size, easy installation
- High efficiency Low standby power consumption, environment-friendly
- Built-in output overcurrent protection, over-voltage protection, short circuit protection
- Built-in EMI filter components, comply with the EN55022 class B standard
- Insulation: class II

**APPLICATIONS**

This series could be widely applied in the LED, light control, Instrument, smart home and other home appliances.



**MODEL LIST**

Part No.	Output Power	DC Voltage	Rated Current	Efficiency 230VAC, % Typ.	Ripple & Noise (max)	Ambient TEMP(°C)	Weight
ZP01S0300WE	1W	3.3Vdc	300mA	65%	<7% Vout	70	16.7g
ZP01S0500WE	1W	5 Vdc	200mA	66%	<5% Vout	70	16.7g
ZP01S0600WE	1W	6 Vdc	167mA	68%	<5% Vout	70	16.7g
ZP01S0700WE	1W	7.5Vdc	133mA	68%	<5% Vout	70	16.7g
ZP01S0800WE	1W	8Vdc	125mA	70%	<5% Vout	70	16.7g
ZP01S0900WE	1W	9Vdc	111mA	72%	<5% Vout	70	16.7g
ZP01S1000WE	1W	10Vdc	100mA	72%	<5% Vout	70	16.7g
ZP01S1200WE	1W	12Vdc	85mA	72%	<5% Vout	70	16.7g
ZP01S1500WE	1W	15Vdc	67mA	74%	<5% Vout	70	16.7g
ZP01S1800WE	1W	18Vdc	55mA	74%	<5% Vout	70	16.7g
ZP01S2400WE	1W	24Vdc	42mA	74%	<5% Vout	70	16.7g


### ELECTRICAL SPECIFICATION

Item		Specification		
Input	Input Voltage Range	90~265Vac or 100~370Vdc		
	AC Input Frequency Range	47~63Hz		
	Input Current	115Vac	230Vac	
		25mA	18mA	
	Inrush Current	115Vac	230Vac	
		6A	10A	
	Stand-by Power Consumption	0.3W Max		
	Recommended External Input Fuse	1A/250V (Time lag)		
Hot Plug	(Unavailable)			
Output	Output Voltage Accuracy	±5% (Typ.)		
	Line Regulation	±1%		
	Load Regulation	±1%		
	Temperature Drift Factor	±0.05%/°C ( 0-85°C )		
	Min. Load	0		
	Set-Up time At Full Load	17.2ms/230Vac,27.7ms/115Vac		
	Hold-up Time At Full Load	168ms/230Vac ,59ms/115Vac		
Protection Characteristics	Over-Circuit Protection	≥120%Io Self-recovery		
	Short Circuit Protection	Hiccup ,continuous ,short capable, self-recovery		
Ambient	Ambient Temperature	- 25°C ~ 85°C (Refer to derating curve)		
	Ambient Humidity	10~90% RH ( No Condensing) at full load		
	Storage Temperature	- 40°C ~ 105°C		
	Storage Humidity	5%~95%		
Safety &EMC requirement	Dielectric Strength	Input-Output ≥3000Vac 5mA 60S		
	Reference Safety Standards	UL/CUL60920 IEC/EN60950 IEC/EN60335 IEC/EN61558-2-16		
	EMI filter Need an external capacitance	CE	Meet CISPR22/EN55022, CLASS B	
		RE	Meet CISPR22/EN55022, CLASS B	
Reliability Requirement	MTBF(MIL-HDBK-217F)	300Khrs Min @230VAC input 25°C		
	Burn-In Test	The unit shall be burned in for 2~5 hours under 264Vac input and DC with full load at normal temperature		

## PRODUCT CHARACTERISTIC CURVE

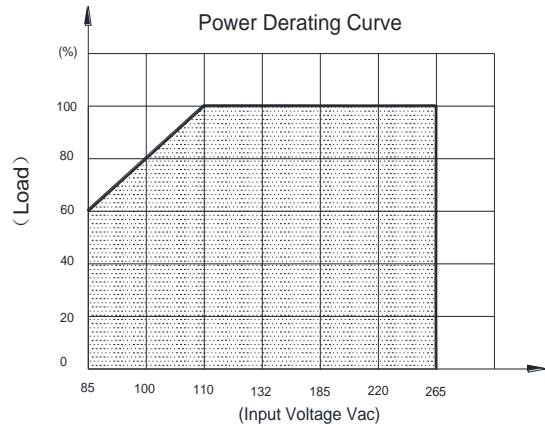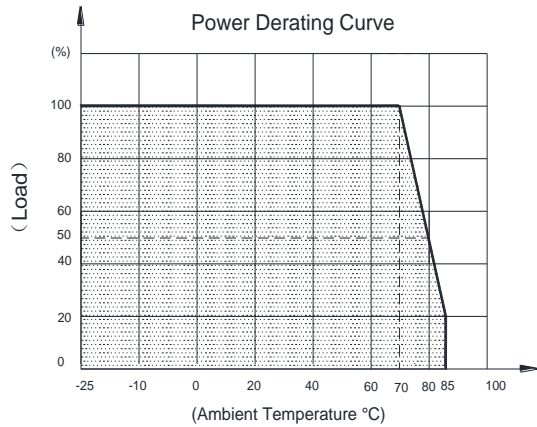

## TYPICAL APPLICATION SCHEMATIC

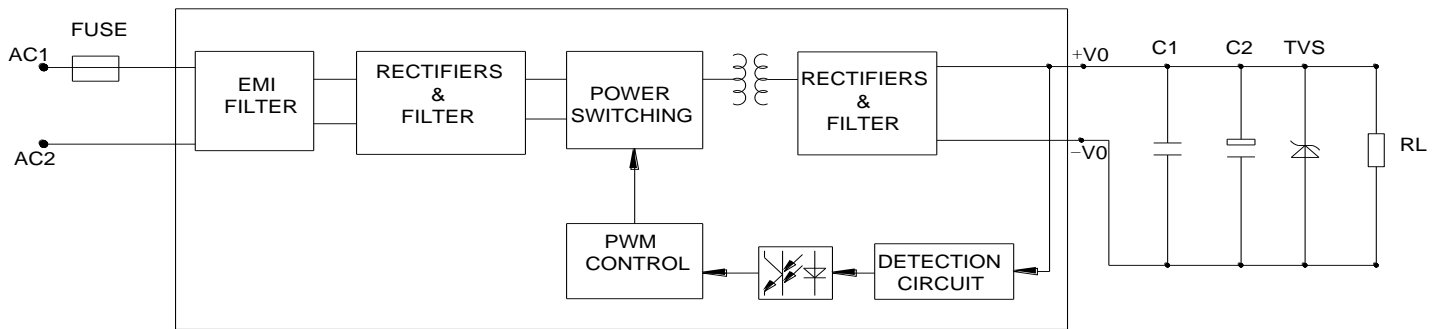

Note; The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meet EMC directives.

Optional recommendations on external components:

C1 from output filter is electrolytic capacitor, High frequency low resistance capacitance is recommended; withstand voltage derating over 80%.

C2 from output filter is ceramic capacitor, to remove high frequency noise.

TVS from output filter is to protect the rear circuit.

Fuse from input filter is to meet safety requirement. Type: 1A/250V Slow-Blow

## MECHANICAL SPECIFICATION

