

F

E

D

C

B

A

F

E


D

C

B

A

24	PS0
23	PS1
22	CSB
21	RST
20	A0
19	RW_WR
18	E
17	D0
16	D1
15	D2
14	D3
13	D4
12	D5
11	D6
10	D7
9	VDD
8	VSS
7	VOUT-OUT
6	VOUT-IN
5	V4
4	V3
3	V2
2	V1
1	V0
PIN NO.	SYMBOL

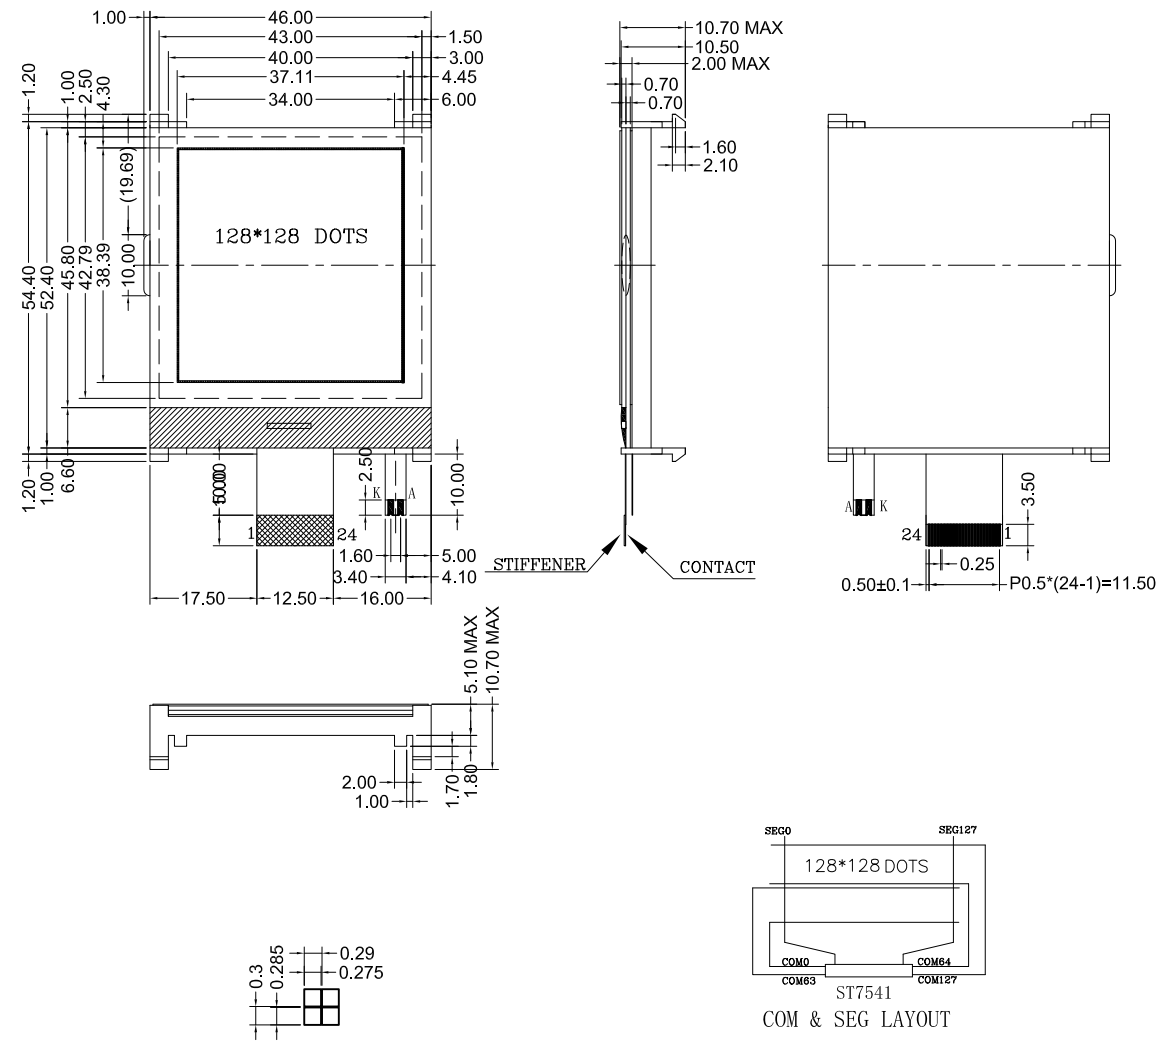

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	9 O'CLOCK
LED BACKLIGHT	WHITE
	Y-G
	RED
	GREEN
	BLUE
	AMBER
TEMPERATURE RANGE	STANDARD TEMPERATURE WIDE TEMPERATURE
CHARACTER PATTERNS	
OPERATING VOLTAGE	3.3V
LCD DRIVING VOLTAGE	12.9V
LCD DRIVE METHOD	1/128 DUTY 1/12BIAS
LCD DRIVE IC	ST7541

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G), TRANSFLECTIVE LCD; Y-G BACKLIGHT; 6 O'CLOCK

UNIT	TOLERANCE
MM	X.X = ±0.2
3RD ANGLE	X.XX = ±0.20
	ANG = -
SCALE:	1:1
DRAWN:	
CHECKED:	
APPROVED:	

**ZETTLER DISPLAYS**

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM
MODEL NO:	AQM1212N SERIES
REV	A
PART NO:	SH NO 1/1