
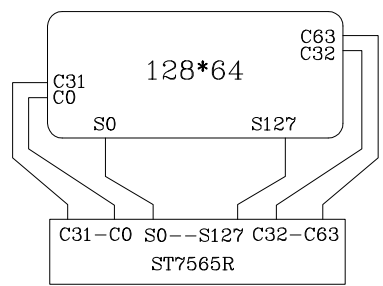


18	NC
17	BLK OV
16	BLA +3.3V
15	VSS
14	VDD
13	D7 (S1)
12	D6 (SCL)
11	D5
10	D4
9	D3
8	D2
7	D1
6	D0
5	/RD (E)
4	/WR (RW)
3	A0
2	/RES
1	/CS1
PIN NO.	SYMBOL

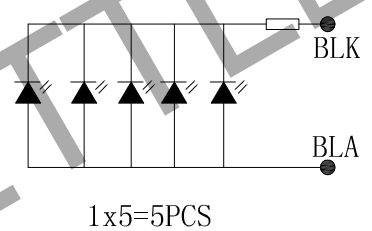

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
VIEWING DIRECTION	6 O'CLOCK
LED BACKLIGHT	WHITE
	Y-G
	RED
	GREEN
	BLUE
	AMBER
TEMPERATURE RANGE	STANDARD TEMPERATURE WIDE TEMPERATURE
CHARACTER PATTERNS	
OPERATING VOLTAGE	3.3V
LCD DRIVING VOLTAGE	--
LCD DRIVE METHOD	1/65 DUTY 1/9BIAS
LCD DRIVE IC	ST7565R

THE PART NUMBER IN MASS PRODUCTION

1.STN(Y-G),TRANSFLECTIVE LCD;Y-G BACKLIGHT;6 O'CLOCK

UNIT MM	TOLERANCE X.X = ±0.3 X.XX = ±0.20 ANG = -
3RD ANGLE 	
SCALE: 1:1	
DRAWN:	
CHECKED:	
APPROVED:	

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE: LCM	
MODEL NO: AQM126GX SERIES	REV A
PART NO:	SH NO 1/1