


AZEV400

4 x 50 AMP / 2 x 80 AMP POWER RELAY WITH MONITORING

FEATURES

- Designed for IEC 61851 Mode 3 charging applications
- 2 or 4 NO load contacts plus NC mirror contact acc. IEC 60947-4-1 / IEC 61810-3
- Wide NO load contact gap of ≥ 4.0 mm, optional pre-make NO load contact
- 4 pole 50 A / 480 VAC or 2 pole 80 A / 480 VAC switching capacity
- Electrical ratings according IEC 61851-1: CC2 / 50,000 cycles
- Withstands inrush currents according IEC 62752 cl. 9.8 and ISO 17409 cl. 8.2.2
- Meets IEC 62955, IEC 62752, IEC 61008-1, IEC 62052-11 short circuit requirements
- Dielectric strength 5 kV_{RMS}, surge withstand voltage 10 kV
- TÜV, UL/CUR and CQC approvals



CONTACTS

Arrangement load contacts monitor contact	4PST-NO (4 Form A) / 2PST-NO (2 Form A) SPST-NC (1 Form B) coupled to load contacts
Ratings (max.) load contacts switched power switched current continuous current switched voltage contact load category monitor contact switched current recommended min. load	(resistive load) 41.5 kVA (LLN), 24 kVA (single contact) 50 A (single contact) / 80 A (parallel contacts) ²⁾ 50 A (single contact) / 80 A (parallel contacts) ²⁾ 480 VAC CC2 500 mA, 12 VDC 10 mA, 5 VDC, 50 mW (gold plated contact)
Approved ratings load contact monitor contact	TÜV, UL/CUR, CQC ¹⁾ 50 A at 480 VAC, resistive, 85°C, 50k cycles 32 A at 480 VAC, resistive, 95°C, 50k cycles 16 A at 480 VAC, resistive, 85°C, 100k cycles 80 A at 480 VAC, resistive, 85°C, 10k cycles ²⁾ 32 A at 480 VAC, AC1, 50k cycles, IEC 60947-4-1 ³⁾ 230A inrush current, IEC 62752 cl. 9.8 ⁴⁾ 500/10 mA at 12VDC, 95°C, 100k cycles ⁵⁾ Notes: 1) All approvals with open vent hole only. 2) Valid only for 4-pole (4PST-NO) type with load contact sets connected in parallel, see chapter <i>Wiring Diagram</i> . 3) IEC 60947-4-1 AC1 approval at TÜV only. 4) IEC 62752 cl. 9.8 / ISO 17409 cl. 8.2.2 tested at TÜV. 5) Monitor contact according IEC 60947-4-1 annex F.7.2. and IEC 61810-3 cl. 5.3
Contact material load contact monitor contact	AgSnO ₂ (silver tin oxide) AgNi (silver nickel, gold plated)
Contact gap load contact monitor contact	≥ 4.0 mm ≥ 0.7 mm (≥ 0.5 mm if load contacts welded)
Initial contact resistance	load contact: ≤ 10 m Ω (6 VDC, 20 A) monitor contact: ≤ 100 m Ω (6 VDC, 1 A)

COIL

Nominal coil DC voltages	6, 9, 12, 24
Dropout voltage	> 5% of nominal coil voltage
Holding voltage	35% - 80% of nominal coil voltage (at 23°C) 40% - 65% of nominal coil voltage (at 85°C)
Coil power 4-pole type (4PST-NO) 2-pole type (2PST-NO)	nominal / holding (at 23 °C) 4.8 W / 0.8 W 3.0 W / 0.5 W
Temperature Rise	70 K (126°F) at holding voltage, 85°C
Max. temperature	class F insulation - 155°C (311°F)

GENERAL DATA

Life Expectancy mechanical electrical	(minimum operations) 2 x 10 ⁵ cycles see approved ratings
Timing operate time release time	≤ 50 ms (at nominal coil voltage) ≤ 30 ms (without coil suppression)
Dielectric Strength open load contacts load contacts sets coil and load contacts load and monitor contacts open monitor contacts coil and monitor contacts	(at sea level for 1 min.) 2 kV _{RMS} 3 kV _{RMS} 5 kV _{RMS} 5 kV _{RMS} 1 kV _{RMS} 1 kV _{RMS}
Short circuit performance IEC 62955 / IEC 61008-1 IEC 62052-11 cl. 9.4.10	U _e = 480 V; I _n = 32 A; I _{nc} /I _{ac} = 10 kA; (seq. E, F) U _n = 480 V; I _{max} = 32 A; overcurrent = 30 I _{max} Note: Short circuit performance tested at TÜV.
Surge Voltage	10kV @ 1.2/50 μ s (coil to load contacts)
Insulation Distances open load contacts load contacts sets coil to load contacts load to monitor contacts coil to monitor contact	(clearance / creepage) ≥ 4.0 mm / ≥ 11.5 mm ≥ 8.6 mm / ≥ 8.9 mm ≥ 9.4 mm / ≥ 10.5 mm ≥ 10.0 mm / ≥ 10.5 mm ≥ 4.0 mm / ≥ 4.8 mm
Insulation Type coil/monitor to load contacts	230/400V, Reinforced insulation, PD 2, OVC III 480V, Basic insulation; PD3; OVC III UL: Suitable where overvoltage protection for a rated impulse withstand voltage peak of 6 kV is provided.
Temperature Range operating and storage	(at holding coil voltage) -40°C (-40°F) to 95°C (203°F)
Vibration	0.3 mm (functional) / 1.5mm (destructive) DA at 10-55 Hz
Shock	2.5g (functional) / 100 g (destructive)
Enclosure protection category material group flammability	PBT polyester flux proof (RTII) / wash tight (RTIII) IIla UL94 V-0
Terminals	Tinned copper alloy, THT PCB mounting
Soldering preheating soldering	(referring IEC 61760-1 wave soldering) 120°C (248°F) / ≤ 120 s 260 $\pm$ 5°C (500 $\pm$ 9°F) / $\leq 2 \times 5$ s
Dimensions and Weight	58.6 mm x 35.0 mm x 45.3 mm, 180 grams
Compliance	UL 508, CSA C22.2, IEC 61810-1, GB/T 21711.1-2023, RoHS, REACH
Agency Approvals TÜV UL/CUR CQC	R 50672404 E365652 CQC25002465625
Packing (pcs.)	5 per plastic tube 60 per carton box

AZEV400

COIL VOLTAGE SPECIFICATIONS

Voltage [VDC]				Resistance [Ω] $\pm 10\%$	
nominal	must operate	min. holding ³⁾	max ²⁾	2-pole type (3.0 W coil)	4-pole type (4.8 W coil)
6	4.5	2.4	6.6	12.0	7.5
9	6.7	3.6	9.9	27.0	16.9
12¹⁾	9.0	4.8	13.2	48.0	30.0
24¹⁾	18.0	9.6	26.4	192.0	120.0

Notes:

1) All values at 23°C, upright position, terminals downward.

2) Voltage max. is the voltage the coil can endure for a short period of time.

3) To avoid overheating at elevated ambient temperatures, we recommend to operate the coil at 55 - 70% of nominal coil voltage after applying the full nominal coil voltage for ≥ 500 ms.

4) Preferred coil voltages in bold face numbers.

ORDERING DATA

AZEV400- AE - D

Special options

nil: standard version
(xxx): special code suffix

Sealing option

nil: flux proof (RTII)
E: sealed version

Nominal coil voltage

see coil voltage specifications table

Monitor contact

nil: without monitor contact

1BG: equipped with 1 Form B monitor contact

Contact arrangement

2: 2-pole type (2PST-NO)


4: 4-pole type (4PST-NO)

Example ordering data

AZEV400-4AE1BG-12D 4-pole type, with monitor contact, 12V/4.8W coil

AZEV400-2AE1BG-24DE 2-pole type, with monitor contact, 24V/3W coil, sealed version

TIMING DIAGRAM

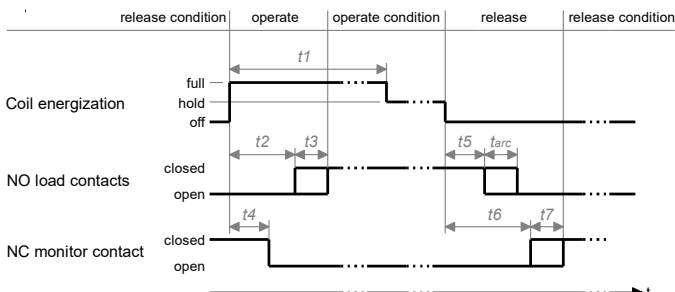

Item	Description	Notes	Timing [ms]		
			min.	typ.	max.
t1	Full energization time	recommended value for reference	200	-	-
t2	NO operate time	at nominal coil voltage (at 23°C) ¹⁾	-	< 35	50
		at nominal coil voltage (at hot coil) ²⁾	-	< 55	80
t3	NO bounce time	at nominal coil voltage	-	< 3	-
t4	NC operate time	at nominal coil voltage (at 23°C) ¹⁾	-	< 30	50
		at nominal coil voltage (at hot coil) ²⁾	-	< 50	80
t5	NO release time	without coil suppression	-	< 5	30
		with suppression: $U_{BR}/U_{nom} = 2$ ³⁾	-	< 10	-
t6	NC release time	with suppression $U_{BR}/U_{nom} = 2$ ³⁾	-	< 7	30
t7	NC bounce time		-	< 15	-
t _{arc}	arcing duration	if released under load, dependent on actual load			

Notes:

1) Cold coil at ambient temperature of 23°C


2) Hot coil with relay operated at max. temperature.

3) Coil suppression breakdown voltage U_{BR} twice the nominal coil voltage U_{nom} .
E.g. 24V transient voltage suppressor diode in parallel to 12V coil.


WIRING DIAGRAM

Viewed from bottom side towards terminals.


4-pole type



2-pole type (standard configuration) ²⁾



High load wiring (> 50Amps) ³⁾



Pin	Description
1, 2	NO load contact set A
3, 4	NO load contact set B
5, 6	NO load contact set C
7, 8	NO load contact set D
11, 12	NC monitor contact
A1	Coil end - winding outer layer
A2	Coil start - winding inner layer

Notes:

1) Pins 11 and 12 are omitted for versions without 1 Form B monitor contact.

2) Contact sets A and B (pins 1, 2, 3, 4) are omitted for the 2-pole standard types. Options with other contact configurations are available on request.

3) For load current greater than 50 Amps, load contact sets must be connected in parallel to share the load current. A parallel connection of contact sets A with B and contact sets C with D is required on the PCB.

4) Versions with FILO option (First-In-Last-Out) available on request. See section *Special Options* for details.

MECHANICAL DATA


Dimensions in mm. Tolerance ± 0.3 mm if not stated otherwise. Illustration shows 4-pole type.

Notes:

1) Pin outline dimensions for reference only and given without tin coating.

2) Pins 11 and 12 are omitted for versions without 1 Form B monitor contact.


3) Pins 1, 2, 3 and 4 are omitted for 2-pole standard types. Other options on request.

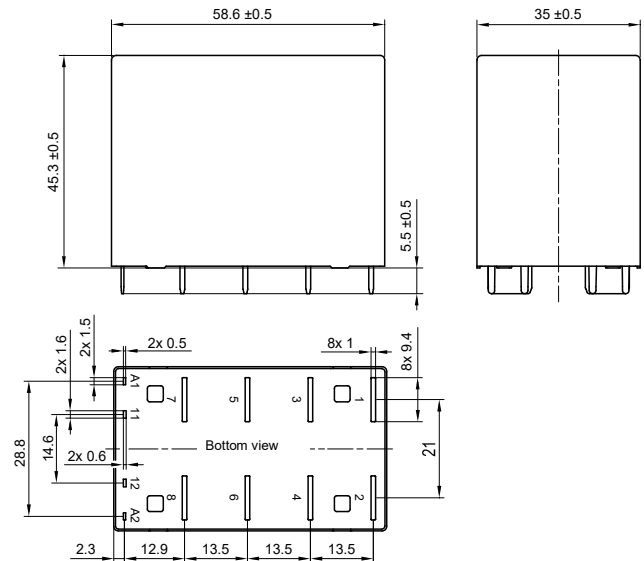

CAD data in attachment of the datasheet.

PCB FOOTPRINT

Layout and footprint recommendation. Dimensions in mm. Illustration shows 4-pole type.

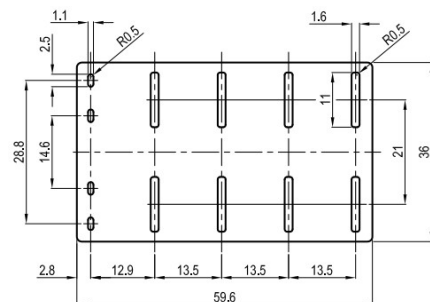

AZEV400

SPECIAL OPTIONS

These components allow for special options and configurations by suffix codes upon request. The following list shows examples of some special options.

Suffix code	Description
0N1	FILO on contact set A (pins 1, 2). Contact set A with slightly lower contact gap than contact sets B, C and D.
0N3	FILO on contact set B (pins 3, 4). Contact set B with slightly lower contact gap than contact sets A, C and D.
0N5	FILO on contact set C (pins 5, 6). Contact set C with slightly lower contact gap than contact sets A, B and D.
0N7	FILO on contact set D (pins 7, 8). Contact set D with slightly lower contact gap than contact sets A, B and C.
N57	FILO on contact sets C (pins 5, 6) and contact sets D (pins 7, 8). Contact sets C and D with slightly lower contact gap than contact sets A and B
117	2-pole type equipped with contact sets A (pins 1, 2) and D (pins 7, 8). Contact sets B and C omitted.

NOTES

General

1. All values in this datasheet are at reference temperature of 23°C (73°F) unless stated otherwise.
2. Evaluate the component's performance and operating conditions under the worst-case conditions of the actual application.
3. The datasheet and the component's specifications are subject to change without notice.

Storage, handling, and environmental guidelines

4. Relays are electromechanical components that are sensitive to shock. The relay's adjustment can be affected if the relay is subjected to excessive shock or excessive pressure is applied to the relay case. Relays which have been dropped must no longer be used.
5. Substances containing silicone or phosphorus must be avoided in the vicinity to the relay. Outgassing from these substances can penetrate the relay and adhere on the contacts. Deposits of these substances may act as insulators and adversely affect the contact resistance. Silicone can be found e.g. in gaskets, lubricants or filling materials, phosphorus can be found e.g. as a flame retardant in plastics.
6. Protect relays from atmospheres containing corrosive gases, liquids, or solids such as water vapor, H₂S, SO₂, NO₂, Cl, P, dust, and other harmful substances and elements. Corrosion of internal structures and contacts leads to malfunction and shortens the component's service life.
7. Prevent non-sealed relays and relays with opened vent hole from atmospheres subject to dust. Dust particles may enter the case and get stuck between the contacts, causing the contact circuits to fail. Do not use these relays in environments with explosive or flammable gases. Electrical arcing at the contacts could ignite these gases and cause fire.
8. For automated dual wave soldering process we recommend preheating with 120°C (248°F) for max. 120 seconds and a soldering temperature of 260 ±5°C (500 ±9°F) for max. 10 seconds soldering time (max. 5 seconds per wave). For manual soldering we recommend 350°C (662°F) max. temperature for max. 5 seconds. During the soldering process, no force may be exerted on the relay terminals.
9. Non-sealed relays must not be washed, immersion cleaned or conformal coated as substances may enter the case and cause corrosion or seizure of mechanical parts.
10. Avoid high frequency or ultrasonic vibrations on the relays as these can cause contact welding and misalignment or destruction of internal structures.
11. During operation, storage and transport, ambient temperature should be within the specified operating temperature range. Humidity should be in the range of 5% to 85% RH. Icing and condensation must be avoided. Relays stored for an extended period of time may show initially increased contact resistance values due to chemical effects such as oxidation.
12. With sealed versions of this relay type, the vent hole must be cut open after washing or conformal coating to achieve the specified performance and service life. Care must be taken to ensure no particles get into the relay as a result of the cutting process.

Design guidelines

13. The relay may pull in and operate with less than the specified *must operate* voltage value.
14. The coil's *must operate* and *min. holding* voltages, the coil's *ohmic resistance* and the relay's *operate time* depend on the temperature of the coil. The specified values are given for a coil temperature of 23°C and increase by approx. 0.39% per Kelvin of temperature rise. This circumstance must be considered, especially during operation with high load currents and elevated ambient temperature.
15. Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time. We recommend using suppression circuits with a breakdown voltage of approx. 2 times the nominal coil voltage in order to achieve a quick release time.
16. For short-circuit performance according IEC62955, IEC61008-1 or IEC62752 (if datasheet has this parameter), coil suppression circuits with a breakdown voltage of ≥ 2 times the nominal coil voltage must be used. Using rectifier diodes or similar in parallel to the coil is not appropriate.
17. When using PWM coil control, use a fast-switching recirculation diode in parallel with the coil to keep the coil current during pulse pauses. To achieve the IEC62955, IEC61008-1 or IEC 62752 (if datasheet has this parameter) required short-circuit performance, when de-energizing the coil, the recirculation diode must be eliminated from the circuit to get a fast decay of coil current and a short release time. As PWM frequency we recommend ≥ 15 kHz in order to avoid audible noise from magnetostriction. To reduce EMI effects, we recommend to apply the PWM to the coil's inner layer terminal and have the outer layer terminal connected to ground or the supply rail.
18. Contact resistance is a function of load current, dwell time and wear level of the contacts. Immediately after closing the contacts, or if tested with low current only, the contact resistance will show a relatively high value. A low level steady state contact resistance is reached at higher current after a certain time in thermal equilibrium.
19. The relay dissipates heat from power losses through its load terminals. Provide sufficient cross section and area of the PCB traces so that they can act as heat spreader.
20. For PCBs with multiple relays, do not place the components directly next to each other. We suggest providing a mounting distance of minimum 10 mm to allow for better cooling.
21. A minimum load of 10 mA / 5 V / 50 mW is recommended for the gold plated monitor contact (if it has) to ensure a reliable and stable electrical connection.
22. As with any contact mechanism, the relay's NC monitor contact (if it has) bounces when switching. For evaluation of its signal, suitable debouncing measures must be taken to get a reliable signal.
23. At elevated ambient temperatures, after applying the rated nominal coil voltage for ≥ 10 times of operate time, the coil energization must be reduced to a holding level in order to reduce thermal stress and prevent the coil from overheating.

AZEV400

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit [zettler-group.com](https://www.zettler-group.com). For support on this product or other ZETTLER relays, please visit one of the group sites below.

SITES FOR ZETTLER RELAYS

NORTH AMERICA

American Zettler, Inc.
www.azettler.com
sales@azettler.com

CHINA

Zettler Group, China
www.zettlercn.com
relay@zettlercn.com

EUROPE

Zettler Electronics, GmbH
www.zettlerelectronics.com
office@zettlerelectronics.com

ASIA PACIFIC

Zettler Electronics (HK) Ltd.
www.zettlerhk.com
sales@zettlerhk.com

Zettler Electronics, Poland
www.zettlerelectronics.pl
office@zettlerelectronics.pl

