

# AZSR143

## 50 AMP MINIATURE POWER RELAY

### FEATURES

- 50 Amp switching capability
- Contact gap: 1.8mm standard / 2.0mm available
- Dielectric strength 4.5 kV<sub>RMS</sub>
- 10kV Surge
- UL class F insulation(155°C)
- UL / CUR E365652
- TÜV B0887930015
- CQC 19002227975



Illustration similar



### CONTACTS

|                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Arrangement                                                                                    | SPST-N.O. (1 Form A)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Ratings (max.)<br>switched power<br>switched current<br>continuous current<br>switched voltage | (resistive load)<br>19200 VA<br>50 A<br>50 A<br>480 VAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Approved ratings                                                                               | <b>UL/CUR</b><br>22 A at 277 VAC, resistive, 85°C, 100k cycles<br>43 A at 277 VAC, resistive, 85°C, 30k cycles<br>33 A at 277 VAC, resistive, 105°C, 30k cycles<br>50 A at 277 VAC, resistive, 85°C, 6k cycles<br>20 A make, 50 A carry, 20 A break at 277 VAC, resistive, 85°C, 50k cycles<br><br><b>TÜV/CQC</b><br>22 A at 277 VAC, resistive, 85°C, 100k cycles<br>43 A at 277 VAC, resistive, 85°C, 30k cycles<br>40 A at 480 VAC, resistive, 85°C, 30k cycles<br>33 A at 277 VAC, resistive, 105°C, 30k cycles<br>50 A at 277 VAC, resistive, 85°C, 6k cycles<br>20 A make, 50 A carry, 20 A break at 480 VAC, resistive, 85°C, 50k cycles |
| Contact material                                                                               | AgSnO <sub>2</sub> (silver tin oxide)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Contact gap<br>standard version<br>option (103) version                                        | ≥ 1.8 mm<br>≥ 2.0 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Initial contact resistance                                                                     | ≤ 100 mΩ (at 6VDC, 1A, voltage drop method)<br>≤ 10 mΩ (at 6VDC, 20A, voltage drop method)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

### COIL

|                                                             |                                         |
|-------------------------------------------------------------|-----------------------------------------|
| Nominal coil DC voltages                                    | 5, 9, 12, 18, 24, 48                    |
| Dropout voltage                                             | > 5% of nominal coil voltage            |
| Holding voltage                                             | > 35% of nominal coil voltage           |
| Coil power<br>nominal<br>holding power<br>at pickup voltage | (at 23 °C)<br>1.6 W<br>196 mW<br>900 mW |
| Temperature Rise                                            | 70 K (126°F) at nom. coil voltage, 85°C |
| Max. temperature                                            | Class F insulation - 155°C (311°F)      |

### GENERAL DATA

|                                                                                |                                                                                                                                                                                             |
|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Life Expectancy<br>mechanical<br>electrical                                    | (minimum operations)<br>1 x 10 <sup>6</sup><br>see approved ratings                                                                                                                         |
| Operate Time                                                                   | 20 ms (max.) at nominal coil voltage                                                                                                                                                        |
| Release Time                                                                   | 10 ms (max.) at nominal coil voltage, without coil suppression                                                                                                                              |
| Dielectric Strength<br>coil to load contacts<br>open load contacts             | (at sea level for 1 min.)<br>4500 V <sub>RMS</sub><br>2500 V <sub>RMS</sub>                                                                                                                 |
| Surge Voltage<br>coil to contacts                                              | 10kV @1.2/50μs                                                                                                                                                                              |
| Insulation Resistance                                                          | 1000 MΩ (min.) at 23°C, 500 VDC, 50% RH                                                                                                                                                     |
| Insulation Type<br>coil to contacts                                            | Reinforced insulation (rated voltage ≤ 300 VAC, pollution degree: 2, overvoltage category: II)<br>Basic insulation (rated voltage > 300 VAC, pollution degree: 2, overvoltage category: II) |
| Temperature Range<br>operating                                                 | (at nominal coil voltage)<br>-40°C (-40°F) to 85°C (185°F)                                                                                                                                  |
| Vibration Resistance                                                           | 0.062" (1.5 mm) DA at 10–55 Hz                                                                                                                                                              |
| Shock                                                                          | 20 g                                                                                                                                                                                        |
| Enclosure<br>material<br>protection category<br>material group<br>flammability | P.B.T. polyester<br>RT II, flux proof<br>IIla<br>UL94 V-0                                                                                                                                   |
| Terminals                                                                      | Tinned copper alloy, P. C.                                                                                                                                                                  |
| Soldering<br>max. temperature<br>max. time                                     | 270 °C<br>5 s                                                                                                                                                                               |
| Dimensions<br>length<br>width<br>height                                        | 30.4 mm (1.20")<br>15.9 mm (0.63")<br>25.15 mm (0.99")                                                                                                                                      |
| Weight                                                                         | 25 grams (approx.)                                                                                                                                                                          |
| Compliance                                                                     | UL 508, IEC 61810-1, RoHS, REACH                                                                                                                                                            |
| Packing unit in pcs                                                            | 50 per plastic tray / 500 per carton box                                                                                                                                                    |

**ZETTLER**

# AZSR143

## COIL VOLTAGE SPECIFICATIONS

| Nominal Coil VDC | Must Operate VDC | Min. Holding VDC | Max. Cont. VDC | Resistance Ohm $\pm 10\%$ |
|------------------|------------------|------------------|----------------|---------------------------|
| 5                | 3.75             | 1.75             | 6.0            | 15.5                      |
| 9                | 6.75             | 3.15             | 10.8           | 50.5                      |
| 12               | 9.0              | 4.2              | 14.4           | 90.0                      |
| 18               | 13.5             | 6.3              | 21.6           | 202.5                     |
| 24               | 18.0             | 8.4              | 28.8           | 360.0                     |
| 48               | 36.0             | 16.8             | 57.6           | 1440                      |

Note: All values at 23°C (73°F), upright position, terminals downward.

## ORDERING DATA

**AZSR143-1AE-**  **D**

Options  
nil: standard version

Nominal coil voltage


### Example ordering data

AZSR143-1AE-24D 24 VDC nominal coil voltage, 1.8 mm contact gap

AZSR143-1AE-24D(103) 24 VDC nominal coil voltage, 2.0 mm contact gap


## WIRING DIAGRAMS

Viewed towards terminals

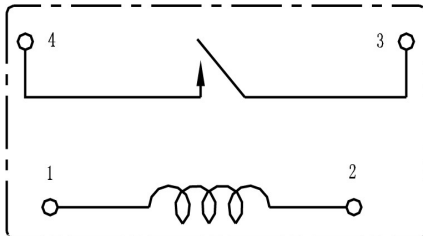


## MECHANICAL DATA

Dimensions in mm. Tolerance:  $\pm 0.3\text{mm}$

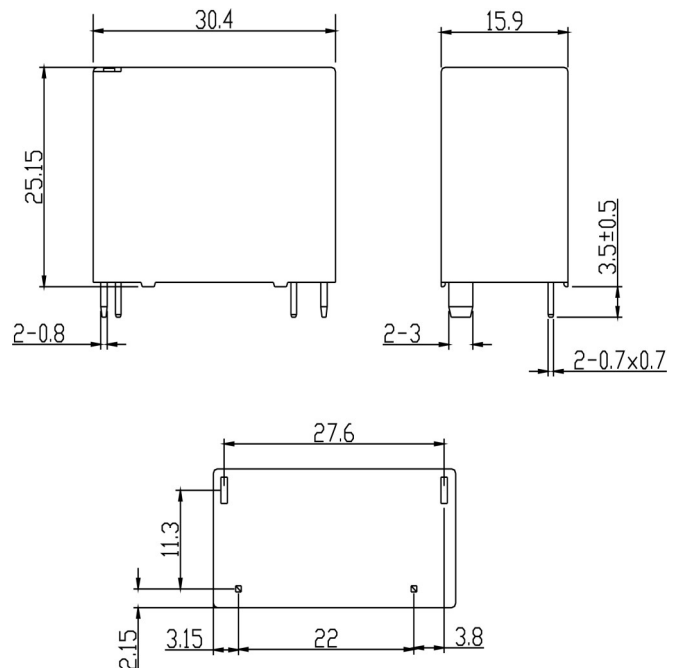

## PC BOARD LAYOUT

Layout recommendation. Viewed towards terminals. Dimensions in mm.

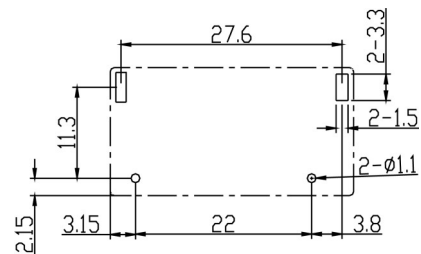

### General

1. All values in this datasheet are at reference temperature of 23°C (73°F) unless stated otherwise.
2. Evaluate the component's performance and operating conditions under the worst-case conditions of the actual application.
3. The datasheet and the component's specifications are subject to change without notice.

### Storage, handling, and environmental guidelines

4. Relays are electromechanical components that are sensitive to shock. The relay's adjustment can be affected if the relay is subjected to excessive shock or excessive pressure is applied to the relay case. Relays which have been dropped must no longer be used.
5. Substances containing silicone or phosphorus must be avoided in the vicinity to the relay. Outgassing from these substances can penetrate the relay and adhere on the contacts. Deposits of these substances may act as insulators and adversely affect the contact resistance. Silicone can be found e.g. in gaskets, lubricants or filling materials, phosphorus can be found e.g. as a flame retardant in plastics.
6. Protect relays from atmospheres containing corrosive gases, liquids, or solids such as water vapor, H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, Cl, P, dust, and other harmful substances and elements. Corrosion of internal structures and contacts leads to malfunction and shortens the component's service life.
7. Prevent non-sealed relays and relays with opened vent hole from atmospheres subject to dust. Dust particles may enter the case and get stuck between the contacts, causing the contact circuits to fail. Do not use these relays in environments with explosive or flammable gases. Electrical arcing at the contacts could ignite these gases and cause fire.
8. For automated dual wave soldering process we recommend preheating with 120°C (248°F) for max. 120 seconds and a soldering temperature of 260 ±5°C (500 ±9°F) for max. 10 seconds soldering time (max. 5 seconds per wave). For manual soldering we recommend 350°C (662°F) max. temperature for max. 5 seconds. During the soldering process, no force may be exerted on the relay terminals.
9. Non-sealed relays must not be washed, immersion cleaned or conformal coated as substances may enter the case and cause corrosion or seizure of mechanical parts.
10. Avoid high frequency or ultrasonic vibrations on the relays as these can cause contact welding and misalignment or destruction of internal structures.
11. During operation, storage and transport, ambient temperature should be within the specified operating temperature range. Humidity should be in the range of 5% to 85% RH. Icing and condensation must be avoided. Relays stored for an extended period of time may show initially increased contact resistance values due to chemical effects such as oxidation.
12. With sealed versions of this relay type, the vent hole must be cut open after washing or conformal coating to achieve the specified performance and service life. Care must be taken to ensure no particles get into the relay as a result of the cutting process.

### Design guidelines

13. The relay may pull in and operate with less than the specified *must operate* voltage value.
14. The coil's *must operate* and *min. holding* voltages, the coil's *ohmic resistance* and the relay's *operate time* depend on the temperature of the coil. The specified values are given for a coil temperature of 23°C and increase by approx. 0.39% per Kelvin of temperature rise. This circumstance must be considered, especially during operation with high load currents and elevated ambient temperature.
15. Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time. We recommend using suppression circuits with a breakdown voltage of approx. 2 times the nominal coil voltage in order to achieve a quick release time.
16. For short-circuit performance according IEC62955, IEC61008-1 or IEC62752 (if datasheet has this parameter), coil suppression circuits with a breakdown voltage of ≥ 2 times the nominal coil voltage must be used. Using rectifier diodes or similar in parallel to the coil is not appropriate.
17. When using PWM coil control, use a fast-switching recirculation diode in parallel with the coil to keep the coil current during pulse pauses. To achieve the IEC62955, IEC61008-1 or IEC 62752 (if datasheet has this parameter) required short-circuit performance, when de-energizing the coil, the recirculation diode must be eliminated from the circuit to get a fast decay of coil current and a short release time. As PWM frequency we recommend ≥ 15 kHz in order to avoid audible noise from magnetostriction. To reduce EMI effects, we recommend to apply the PWM to the coil's inner layer terminal and have the outer layer terminal connected to ground or the supply rail.
18. Contact resistance is a function of load current, dwell time and wear level of the contacts. Immediately after closing the contacts, or if tested with low current only, the contact resistance will show a relatively high value. A low level steady state contact resistance is reached at higher current after a certain time in thermal equilibrium.
19. The relay dissipates heat from power losses through its load terminals. Provide sufficient cross section and area of the PCB traces so that they can act as heat spreader.
20. For PCBs with multiple relays, do not place the components directly next to each other. We suggest providing a mounting distance of minimum 10 mm to allow for better cooling.
21. A minimum load of 10 mA / 5 V / 50 mW is recommended for the gold plated monitor contact (if it has) to ensure a reliable and stable electrical connection.
22. As with any contact mechanism, the relay's NC monitor contact (if it has) bounces when switching. For evaluation of its signal, suitable debouncing measures must be taken to get a reliable signal.
23. At elevated ambient temperatures, after applying the rated nominal coil voltage for ≥ 10 times of operate time, the coil energization must be reduced to a holding level in order to reduce thermal stress and prevent the coil from overheating.

# AZSR143

## DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

## ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit [zettler-group.com](https://www.zettler-group.com). For support on this product or other ZETTLER relays, please visit one of the group sites below.

## SITES FOR ZETTLER RELAYS

### NORTH AMERICA

American Zettler, Inc.  
[www.azettler.com](https://www.azettler.com)  
[sales@azettler.com](mailto:sales@azettler.com)

### EUROPE

Zettler Electronics, GmbH  
[www.zettlerelectronics.com](https://www.zettlerelectronics.com)  
[office@zettlerelectronics.com](mailto:office@zettlerelectronics.com)

Zettler Electronics, Poland  
[www.zettlerelectronics.pl](https://www.zettlerelectronics.pl)  
[office@zettlerelectronics.pl](mailto:office@zettlerelectronics.pl)

### CHINA

Zettler Group, China  
[www.zettlercn.com](https://www.zettlercn.com)  
[relay@zettlercn.com](mailto:relay@zettlercn.com)

### ASIA PACIFIC

Zettler Electronics (HK) Ltd.  
[www.zettlerhk.com](https://www.zettlerhk.com)  
[sales@zettlerhk.com](mailto:sales@zettlerhk.com)



# ZETTLER