ZETTLER DISPLAYS

SPECIFICATIONS FOR LIQUID CRYSTAL DISPLAY

	CUSTOMER APP	ROVAL	
※ PART NO. :	ATM0700L61K-CT (ZE	TTLER DISPLA	YS) SPEC VER1.3
APPROVAL		COMPANY CHOP	
CUSTOMER			
COMMENTS			

ZETTLER DISPLAYS ENGINEERING APPROVAL					
DESIGNED BY	CHECKED BY	APPROVED BY			
XW	GZC	GuZH			

REVISION	RECORD REVISION DATE	PAGE	CONTENTS
VER1.0	2020-05-22		FIRST ISSUE
VER1.1	2021-04-23	ALL	ADD THE CONTENT OF TBD IN THE SPECIFICATION OF THE PREVIOUS VERSION
VER1.2	2022-12-21	4	CORRECTED HIGH AND LOW LEVEL FUNCTION OF 28PIN
VER1.3	2023-09-20	5	CORRECT RECOMMENDED TOUCH SCREEN CONNECTOR MODEL

REVISION RECORD

※ CONTENTS

- 1. GENERAL SPECIFICATIONS
- 2. PIN ASSIGNMENT
- 3. OPERATING SPECIFICATIONS
- 4. OPTICAL SPECIFICATIONS
- 5. RELIABILITY TEST
- 6. PRECAUTION FOR USING LCM
- 7. MECHANICAL DRAWING
- 8. PACKAGE DRAWING
- 9. INSPECTION SPECIFICATION

1. GENERAL SPECIFICATIONS

ltem	Specification	Remark
1. LCD size	7.0 inch(Diagonal)	
2. Driver element	a-Si TFT active matrix	
3. Resolution	1024x(RGB)x600	
4. Display mode	Normally black, IPS, Transmissive	
5. Dot Pitch (W*H)	0.0502mm(W) x 0.1432mm(H)	
6. Pixel pitch(W*H)	0.1506mm(W) x 0.1432mm(H)	
7. Active Area(W*H)	154.21mm(W) x 85.92mm(H)	
8. Module size (W*H)	176.42mm(W) x 115.7mm(H) x 8.3mm(D)	Note 1
9. Surface treatment	Clear	
10. Color arrangement	RGB-stripe	
11. Color	16.7M / 262K	
12. Viewing angle (L/R/T/B)	80/80/80/80	
13. Interface	4-lane / 3-lane LVDS interface	
14. LCD controller	HX8282+HX8696	
15. LCM brightness	1000 cd/m2 Typ.	
16. Backlight driving condition	480mA @9.0V	
17. Touch panel	Capacitive	
18. Touch controller	GT911	
19. Operation temperature	-20~70 °C	
20. Weight	221.8g(Typ.)	
21. RoHS	RoHS compliant	

Note 1: Please refer to mechanical drawing.

2. PIN ASSIGNMENT

TFT LCD Panel Driving Section


FPC Connector is used for the module electronics interface. The recommended model is HIROSE FH33J-40S-0.5SH(10), MOLEX 0541044031 or compatible.

Pin No.	Symbol	Function	Level	Note
1	VCOM	Common voltage	Р	
2~3	VDD	Power voltage, 3.3V typical	Р	
4	NC	No connection	-	
5	RESET	Global reset pin	I	
6	STBYB	Standby mode, normally pulled high STBYB = 1 ,normal operation;STBYB = 0 ,display shutdown	I	
7	GND	Ground	Р	
8	RXIN0-	-LVDS differential data input 0	I	
9	RXIN0+	+LVDS differential data input 0	I	
10	GND	Ground	Р	
11	RXIN1-	-LVDS differential data input 1	I	
12	RXIN1+	+LVDS differential data input 1	I	
13	GND	Ground	Р	
14	RXIN2-	-LVDS differential data input 2	I	
15	RXIN2+	+LVDS differential data input 2	I	
16	GND	Ground	Р	
17	RXCLKIN-	-LVDS differential clock input	I	
18	RXCLKIN+	+LVDS differential clock input	Ι	
19	GND	Ground	Р	
20	RXIN3-	-LVDS differential data input 3	I	
21	RXIN3+	+LVDS differential data input 3	I	
22	GND	Ground	Р	
23~24	NC	No connection	-	
25	GND	Ground	Р	
26	NC	No connection	-	
27	DIMO	Backlight CABC controller signal	0	
28	SELB	6bit/8bit mode select . SELB=" L" , 8-bit; SELB=" H" , 6-bit	I	
29	AVDD	Power for analog circuit	Р	
30	GND	Ground	Р	
31~32	LED-	LED cathode	Р	
33	L/R	Horizontal inversion SHLR = "L", shift left: SHLR = "H", shift right:	I	
34	U/D	Vertical inversion SHLR = "L", shift down: SHLR = "H", shift up:	I	
35	VGL	Gate off voltage	Р	
36~37	GND	Ground	Р	
38	VGH	Gate on voltage	Р	
39~40	LED+	LED anode	Р	

I: input, O: output, P: Power

Touch Panel Section

Recommended connector: Hirose FH12-8S-0.5SH or compatible

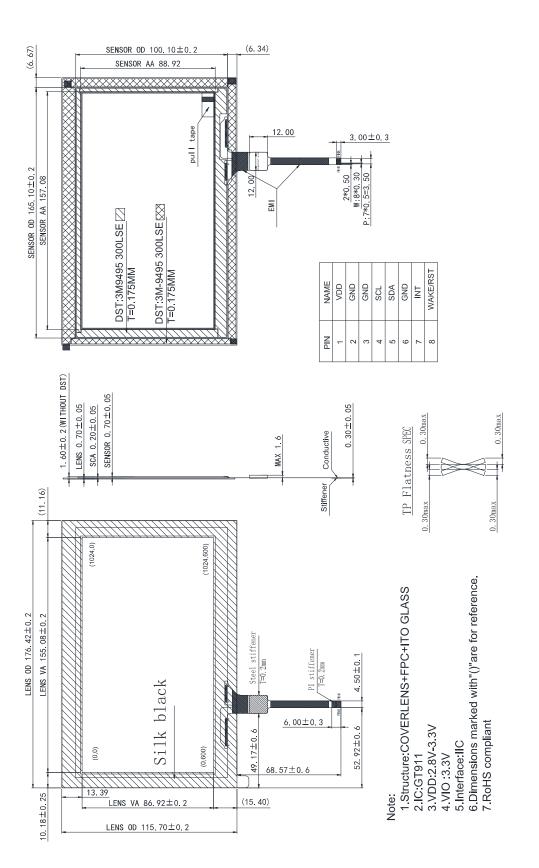

3. Operating Specification

3.1 ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Val	ues	Unit	Remark	
nem	Symbol	Min.	Max.	Onic	Remark	
	V _{DD}	-0.5	3.96	V		
Power Voltage	AV _{DD}	-0.5	14.85	V		
	V _{GH}	-0.3	42	V		
	V _{GL}	-42	0.3	V		
Operation Temperature	T _{OP}	-20	70	°C		
Storage Temperature	T _{ST}	-30	80	°C		
LED Reverse Voltage	V _R	-	1.2	V	Each LED Note 2	
LED Forward Current	١ _F		80	mA	Each LED	

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

Note 2: V_R Conditions: Zener Diode 20mA

3.1.1 Typical Operation Conditions

ltem	Symbol		Values	Unit	Remark	
	Symbol	Min.	Тур.	Max.	Onit	Remark
	V _{DD}	3.0	3.3	3.6	V	
Bower Voltage	AV _{DD}	9.4	9.6	9.8	V	
Power Voltage	V _{GH}	17.5	18.0	18.5	V	
	V _{GL}	-6.5	-6	-5.5	V	
Input Signal Voltage	V _{COM}	2.3	3.5	4.2	V	
Input Logic High Voltage	V _{IH}	0.7DV _{DD}		DV _{DD}	V	
Input Logic Low Voltage	V _{IL}	0		$0.3 DV_{DD}$	V	

Note 1: Be sure to apply V_{DD} and V_{GL} to the LCD first, and then apply V_{GH} .

3.1.2 Current Consumption


ltem	Symbol		Values		Unit	Remark
item	Symbol	Min.	Тур.	Max.	Onit	Kennark
	I _{GH}		5.2	10.2	mA	V _{GH} =18.0V
Bower Voltage	I _{GL}		4.7	9.7	mA	V _{GL} =-6.0V
Power Voltage	I _{VDD}		14	19	mA	V _{DD} =3.3V
	I _{AVDD}		31.0	50.0	mA	AV _{DD} =9.6V

3.1.3 Backlight driving conditions

Item	Symbol	Values		Unit	Remark	
	Symbol	Min.	Тур.	Max.	Onic	Kentark
Voltage for LED Backlight	VL	7.8	9.0	10.2	V	Note 1
Current for LED Backlight	I _L =60mA*8	-	480	-	mA	
LED life time		30000			Hr	Note 2


Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25 $^\circ\! \mathbb C$ and I_L =480mA.

Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25 $^{\circ}$ C and I_L =480mA.




3.2 Power Sequence

a.Power on:

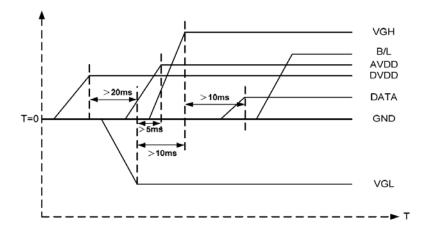

 $V_{\text{DD}} {\rightarrow} V_{\text{GL}} {\rightarrow} V_{\text{GH}} {\rightarrow} Data {\rightarrow} B/L$

b.Power off:

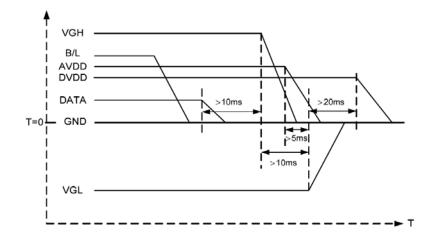


 $B/L{\rightarrow}Data{\rightarrow}V_{GH}{\rightarrow}V_{GL}{\rightarrow}V_{DD}$

3.3 Timing Characteristics

3.3.1 DC Electrical Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Differential input high threshold voltage	Rxvтн	0.1	0.2	0.3	V	RxVCM=1.2V
Differential input low threshold voltage	Rxvtl	-0.3	-0.2	-0.1	V	
Input voltage range(singled-end)	Rxvin	0.7	-	1.7	V	
Differential input impedance	Zid	80	100	125	ohm	
Differential input commom mode voltage	Rxvсм	1	1.2	1.4	V	VID =1.2V
Differential input voltage	[Vid]	0.2	-	0.6	V	
Differential input leakage current	ILCLVDS	-10	-	+10	uA	

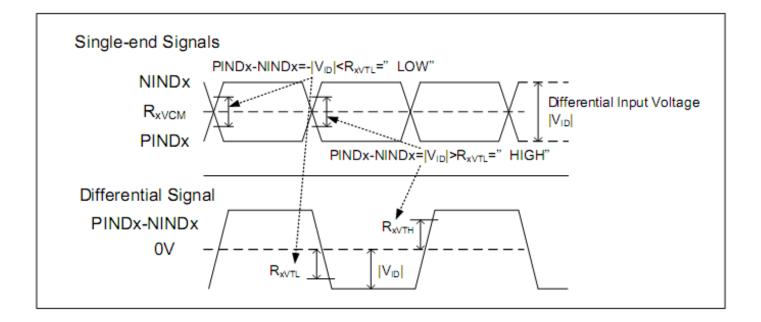

3.3.2 Timing

DE mode

DE mode					
Parameter	Symbol		Unit		
Falameter	Symbol	Min.	Тур.	Max.	Onic
DCLK frequency @Frame rate=60hz	fclk	40.8	51.2	67.2	Mhz
Horizontal display area	thd		1024		DCLK
HSYNC period time	th	1114	1344	1400	DCLK
HSYNC blanking	thb+thfp	90	320	376	DCLK
Vertical display area	tvd		600		Н
VSYNC period time	tv	610	635	800	Н
VSYNC blanking	tvb+tvfp	10	35	200	Н

HV mode(1)

Parameter		Symbol		Value		Unit
Horizontal display a	rea	thd		1024		DCLK
DCLK frequency@ Frame rate=60hz		fclk	Min.	Тур.	Max.	
		ICIK	44.9	51.2	63	Mhz
1 Horizontal Line		th	1200	1344	1400	
	Min.		1			7
HSYNC pulse width	Тур.	thpw				
	Max.			140		
HSYNC back porch		thbp	160	160	160	1
HSYNC front porch		thfp	16	160	216	1

HV mode(2)

Vertical input timing									
Parameter	Cymelael		Unit						
Farameter	Symbol	Min.	Тур.	Max.	Unit				
Vertical display area	tvd		600		н				
VSYNC period time	tv	624	635	750	н				
VSYNC pulse width	tvpw	1	_	20	н				
VSYNC back porch	tvb	23	23	23	Н				
VSYNC front porch	tvfp	1	12	127	Н				

٦

4.0 OPTICAL SPECIFICATIONS

ltem	Symbol	Condition		Values	Unit	Remark		
item	Symbol	Condition	Min.	Тур.	Max.	Unit	Remark	
	θ∟	Φ=180°(9 Ο'CLOCK)	70	80			Note 1	
Viewing Angle	θ _R	Φ=0°(3 O'CLOCK)	70	80		dograa		
(CR ≥10)	θτ	Φ=90°(12 O'CLOCK)	70	80		degree		
	θ _B	Φ=270°(6 Ο'CLOCK)	70	80				
Response Time	T _{ON+} T _{OFF}			30		msec	Note 3	
Contrast Ratio	CR		600	800			Note 4	
	W _x	Normal	0.26	0.31	0.36		Note 2	
Color Chromaticity	W _Y	Θ=Φ=0°	0.28	0.33	0.38		Note 5 Note 6	
Luminance	L		800	1000		cd/m ²	Note 6	
Luminance Uniformity	YU		75	80		%	Note 7	

Test Conditions:

1. IL=480mA (Backlight current), the ambient temperature is 25 $^\circ\!{\rm C}.$ 2. The test systems refer to Note 2.

Note 1: Definition of viewing angle range

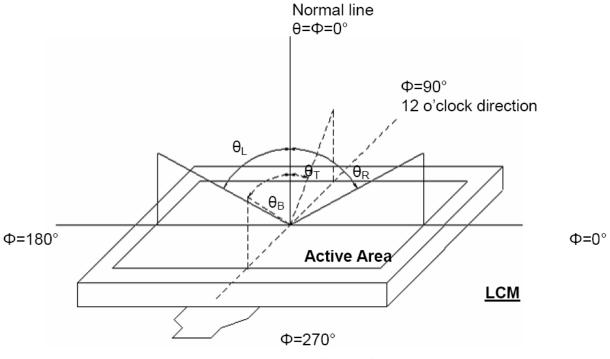


Figure 4.1 Definition of viewing angle.

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON

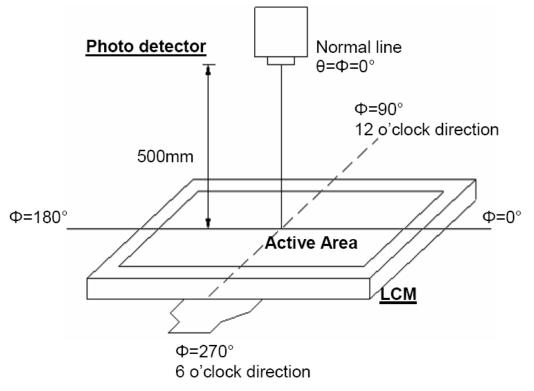


Figure 4.2 Optical measurement system setup

Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

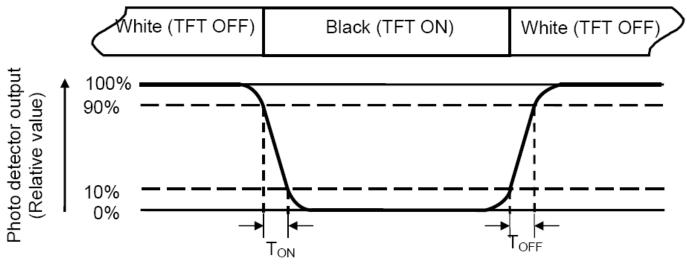


Figure 4.3 Definition of response.

Note 4: Definition of contrast ratio

 $Contrast ratio(CR) = \frac{Luminance measured when LCD on the "white" state}{Luminance measured when LCD on the "black" state}$

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel.

Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4.4). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (Yu) =
$$\frac{B_{min}}{B_{max}}$$

L-----Active area length W----- Active area width

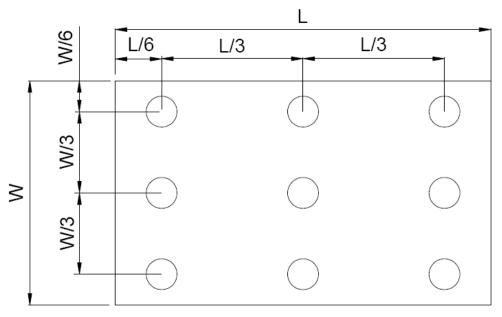


Figure 4.4 Definition of measuring points.

Bmax: The measured maximum luminance of all measurement position. Bmin: The measured minimum luminance of all measurement position.

5. RELIABILITY TEST

ltem	Test Condition Item	Remark
High temperature storage	Ta= 80 °C 96hrs	Note 1,3
Low temperature storage	Ta=-30 °C 96hrs	Note 1,3
High temperature operation	Ts= 70 °C 96hrs	Note 2,4
Low temperature operation	Ts=-20 °C 96hrs	Note 1,4
High temperature/High humidity operation	90% RH 60°C 96hrs	Note 3
Thermal Shock	-30° C/30 min ~ +80°C/30 min for a total 100 cycles, Start with cold temperature and end with high temperature.	Note 3
Vibration test	Freq:10~55~10Hz Amplitude:1.5mm 2 hours for each direction of X,Y,Z (6 hours for total)	
Mechanical shock	100G 6ms,±X, ±Y, ±Z 3 times for each direction	
Package vibration test	Random Vibration : 0.015G*G/Hz from 5-200HZ, -6dB/Octave from 200-500HZ 2 hours for each direction of X. Y. Z. (6 hours for total)	
Package drop test	Height:60 cm 1 corner, 3 edges, 6 surfaces	
Electro static discharge	\pm 2KV, 150pF(330 Ω) 1sec, 100 points, 1 times/ point.Contact mode	

Note 1: Ta is the ambient temperature of samples.

Note 2: Ts is the temperature of panel's surface.

Note 3: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

6. PRECAUTION FOR USING LCM

- 1. When design the product with this LCD Module, make sure the viewing angle matches to its purpose of usage.
- 2. As LCD panel is made of glass substrate, Dropping the LCD module or banging it against hard objects may cause cracking or fragmentation. Especially at corners and edges.
- 3. Although the polarizer of this LCD Module has the anti-glare coating, always be careful not to scratch its surface. Use of a plastic cover is recommended to protect the surface of polarizer.
- 4. If the LCD module is stored at below specified temperature, the LC material may freeze and be deteriorated. If it is stored at above specified temperature, the molecular orientation of the LC material may change to Liquid state and it may not revert to its original state. Excessive temperature and humidity could cause polarizer peel off or bubble. Therefore, the LCD module should always be stored within specified temperature range.
- 5. Saliva or water droplets must be wiped off immediately as those may leave stains or cause color changes if remained for a long time. Water vapor will cause corrosion of ITO electrodes.
- 6. If the surface of LCD panel needs to be cleaned, wipe it swiftly with cotton or other soft cloth. If it is not still clean enough, blow a breath on the surface and wipe again.
- 7. The module should be driven according to the specified ratings to avoid malfunction and permanent damage. Applying DC voltage cause a rapid deterioration of LC material. Make sure to apply alternating waveform by continuous application of the M signal. Especially the power ON/OFF sequence should be kept to avoid latch-up of driver LSIs and DC charge up to LCD panel.
- 8. Mechanical Considerations
 - a) LCM are assembled and adjusted with a high degree of precision. Avoid excessive shocks and do not make any alterations or modifications. The following should be noted.
 - b) Do not tamper in any way with the tabs on the metal frame.
 - c) Do not modify the PCB by drilling extra holes, changing its outline, moving its components or modifying its pattern.
- 9. Static Electricity
 - a) Operator

Wear the electrostatics shielded clothes because human body may be statically charged if not ware shielded clothes. Never touch any of the conductive parts such as the LSI pads; the copper leads on the PCB and the interface terminals with any parts of the human body.

b) Equipment

There is a possibility that the static electricity is charged to the equipment, which has a function of peeling or friction action (ex: conveyer, soldering iron, working table). Earth the equipment through proper resistance (electrostatic earth: $1x10^8$ ohm).

Only properly grounded soldering irons should be used.

If an electric screwdriver is used, it should be well grounded and shielded from commutator sparks.

The normal static prevention measures should be observed for work clothes and working benches; for the latter conductive (rubber) mat is recommended.

c) Floor

Floor is the important part to drain static electricity, which is generated by operators or equipment.

There is a possibility that charged static electricity is not properly drained in case of insulating floor. Set the electrostatic earth (electrostatic earth: $1x10^8$ ohm).

d) Humidity

Proper humidity helps in reducing the chance of generating electrostatic charges. Humidity should be kept over 50%RH. e) Transportation/storage

The storage materials also need to be anti-static treated because there is a possibility that the human body or storage materials such as containers may be statically charged by friction or peeling.

The modules should be kept in antistatic bags or other containers resistant to static for storage.

f) Soldering

Soldering anything to this TFT display would void the warranty.

g) Others


The laminator (protective film) is attached on the surface of LCD panel to prevent it from scratches or stains. It should be peeled off slowly using static eliminator.

Static eliminator should also be installed to the workbench to prevent LCD module from static charge.


- 10. Operation
 - a) Driving voltage should be kept within specified range; excess voltage shortens display life.
 - b) Response time increases with decrease in temperature.
 - c) Display may turn black or dark blue at temperatures above its operational range; this is (however not pressing on the viewing area) may cause the segments to appear "fractured".
 - d) Mechanical disturbance during operation (such as pressing on the viewing area) may cause the segments to appear "fractured".

- 11. If any fluid leaks out of a damaged glass cell, wash off any human part that comes into contact with soap and water. The toxicity is extremely low but caution should be exercised at all the time.
- 12. Disassembling the LCD module can cause permanent damage and it should be strictly avoided.
- 13. LCD retains the display pattern when it is applied for long time (Image retention). To prevent image retention, do not apply the fixed pattern for a long time. Image retention is not a deterioration of LCD. It will be removed after display pattern is changed.
- 14. Do not use any materials, which emit gas from epoxy resin (hardener for amine) and silicone adhesive agent (dealcohol or deoxym) to prevent discoloration of polarizer due to gas.
- 15. Avoid the exposure of the module to the direct sunlight or strong ultraviolet light for a long time.

7. MECHANICAL DRAWING

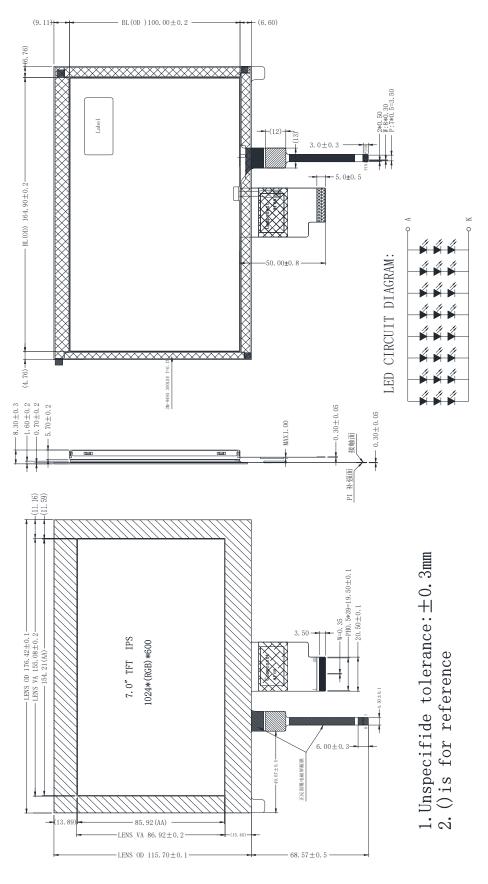

8. PACKAGE DRAWING

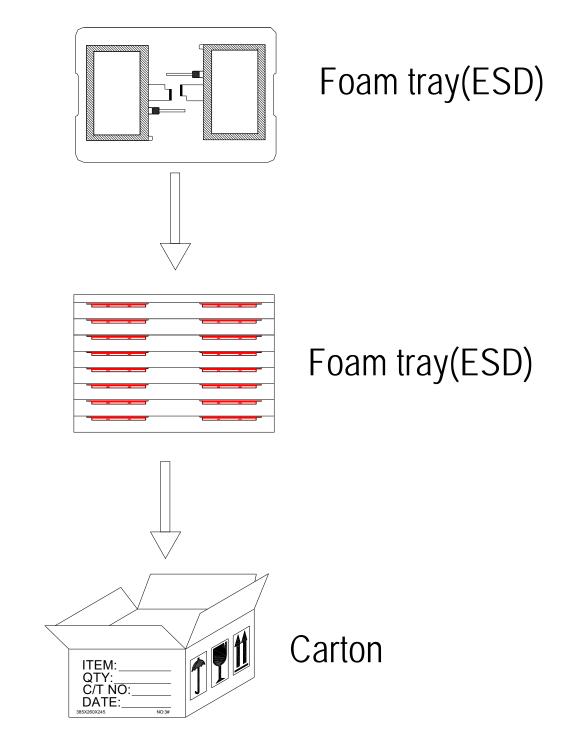

Carton size	38.5x26x24.5	cm
Quantity per carton	16	pcs

9. INSPECTION SPECIFICATION

1. SCOPE SPECIFICATIONS CONTAIN

- 1.1 DISPLAY QUALITY EVALUATION
- 1.2 MECHANICS SPECIFICATION

2. SAMPLING PLAN

UNLESS THERE IS OTHER AGREEMENT, THE SAMPLING PLAN FOR INCOMING INSPECTION SHALL FOLLOW MIL-STD-105E.

- 2.1 LOT SIZE: QUANTITY PER SHIPMENT AS ONE LOT (DIFFERENT MODEL AS DIFFERENT LOT).
- 2.2 SAMPLING TYPE: NORMAL INSPECTION, SINGLE SAMPLING.
- 2.3 SAMPLING LEVEL: LEVEL II.
- 2.4 AQL: ACCEPTABLE QUALITY LEVEL
 - MAJOR DEFECT: AQL=0.65
 - MINOR DEFECT: AQL=1.0

3. PANEL INSPECTION CONDITION

3.1 ENVIRONMENT:

- ROOM TEMPERATURE: 25±5°C.
- HUMIDITY: 65±5% RH.
- ILLUMINATION: 300 ~ 700 LUX.
- 3.2 INSPECTION DISTANCE:
- 35±5 CM
- 3.3 INSPECTION ANGLE:
 - THE VISION OF INSPECTOR SHOULD BE PERPENDICULAR TO THE SURFACE OF THE MODULE.
- 3.4 INSPECTION TIME:

PERCEPTIBILITY TEST TIME: 20 SECONDS MAX.

4. DISPLAY QUALITY

4.1 FUNCTION RELATED:

THE FUNCTION DEFECTS OF LINE DEFECT, ABNORMAL DISPLAY, AND NO DISPLAY ARE CONSIDERED MAJOR DEFECTS.

4.2 BRIGHT/DARK DOTS:

Defect Type	Specification	Major	Minor
Bright Dots	N≦2		•
Drak Dots	N≦3		•
Total Bright and Dark Dots	N≦4		•

Note: 1:

The definition of dot: The size of a defective dot over 1/2 of whole dot is regarded as one defective dot.

Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern. The bright dot defect must be visible through 2% ND filter

Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue pattern.

4.3 Pixel Definition:

R	G	В	R	G	В	R	G	В	Dot Defect
R	G	В	R	G	В	R	G	В	Adjacent Dot Defect
R	G	В	R	G	В	R	G	В	Cluster

Note 1:

If pixel or partial sub-pixel defects exceed 50% of the affected pixel or sub-pixel area, it shall be considered as1 defect.

Note 2:

There should be no distinct non-uniformity visible through 2% ND Filter within 2 sec inspection times.

4.4Visual Inspection specifications:

De	efect Type	Specification Size	Count (N)	Major	Minor	
Γ	Oot shape	D≤0.25mm	Ignored			
(Particle、So	cratch and Bubbles in	0.25mm <d≤0.5mm< td=""><td>N≪3</td><td></td><td></td></d≤0.5mm<>	N≪3			
dis	splay area)	D>0.5mm	N=0		·	
Nautas Disa	(On he fan Taurahan an all)	D≪70mm	N≪4			
Newton Ring	(Only for Touch panel)	D>70mm	N=0		•	
		0.1mm <d≤0.2mm< td=""><td>N≪4</td><td></td><td></td></d≤0.2mm<>	N≪4			
-	(Only for Touch panel) ubble/Dent)	0.2mm <d≪0.3mm< td=""><td>N≪3</td><td></td><td>•</td></d≪0.3mm<>	N≪3		•	
(DC	ubble/Denty	0.3mm <d≪0.4mm< td=""><td>N≤2</td><td></td><td></td></d≪0.4mm<>	N≤2			
	ine shape	W≪0.01mm	Ignored			
	atch、Lint and Bubbles isplay area)	0.01mm $<$ W \leqslant 0.05mm, and L \leqslant 3mm	0.01mm ${<}$ W ${\leq}$ 0.05mm , and L ${\leq}$ 3mm $$ N ${\leq}$ 3			
L		W>0.05mm, or L>3mm N=0				
Bubble in	cell (active area)	It should be found by eyes			•	
	Scratch	No harm		•		
Bezel	Dirt	No harm		•		
Dezei	Wrap	No harm			•	
	Sunken	No harm			•	
	No label	No			•	
	Inverted label	No			•	
	Broken	No		•		
Label	Dirt	Word can be read			•	
Laber	Not clear	No			•	
	Word out of shape	No			•	
	Mistake	No			•	
	Position	Be attached on right position			•	
Screw	Not enough	No		•		
SURM	Limp	No		●		
Connector	Connection status	No bend on PINs and damage		●		
FPC/FFC	Broken	Broken No				

Note: Extraneous substance and scratch not affecting the display of image, for instance, extraneous substance under polarizer film but outside the display area, or scratch on metal bezel and backlight module or polarizer film outside the display area, shall not be considered as defective or non-conforming.